

Data-Intensive Distributed Computing

CS 451/651 (Fall 2018)

Part 2: From MapReduce to Spark (1/2)

September 20, 2018

Jimmy Lin

David R. Cheriton School of Computer Science

University of Waterloo

These slides are available at <http://lintool.github.io/bigdata-2018f/>



This work is licensed under a Creative Commons Attribution-NonCommercial-Share Alike 3.0 United States
See <http://creativecommons.org/licenses/by-nc-sa/3.0/us/> for details



Debugging at Scale

Works on small datasets, won't scale... why?

Memory management issues (buffering and object creation)

Too much intermediate data

Mangled input records

Real-world data is messy!


There's no such thing as "consistent data"

Watch out for corner cases

Isolate unexpected behavior, bring local

An aerial photograph of a large industrial facility, likely a datacenter, situated in a rural area. The facility consists of several large, white, rectangular buildings with flat roofs, arranged in a grid-like pattern. In the foreground, there is a large parking lot filled with many white semi-trailers. To the right, a large building with a complex roof structure, possibly a cooling or power plant, is visible. The surrounding landscape is a mix of green fields and brown, tilled soil. In the background, a line of trees and distant hills are visible under a sky with a bright, low sun, creating a warm, orange glow.

The datacenter *is* the computer!
What's the instruction set?

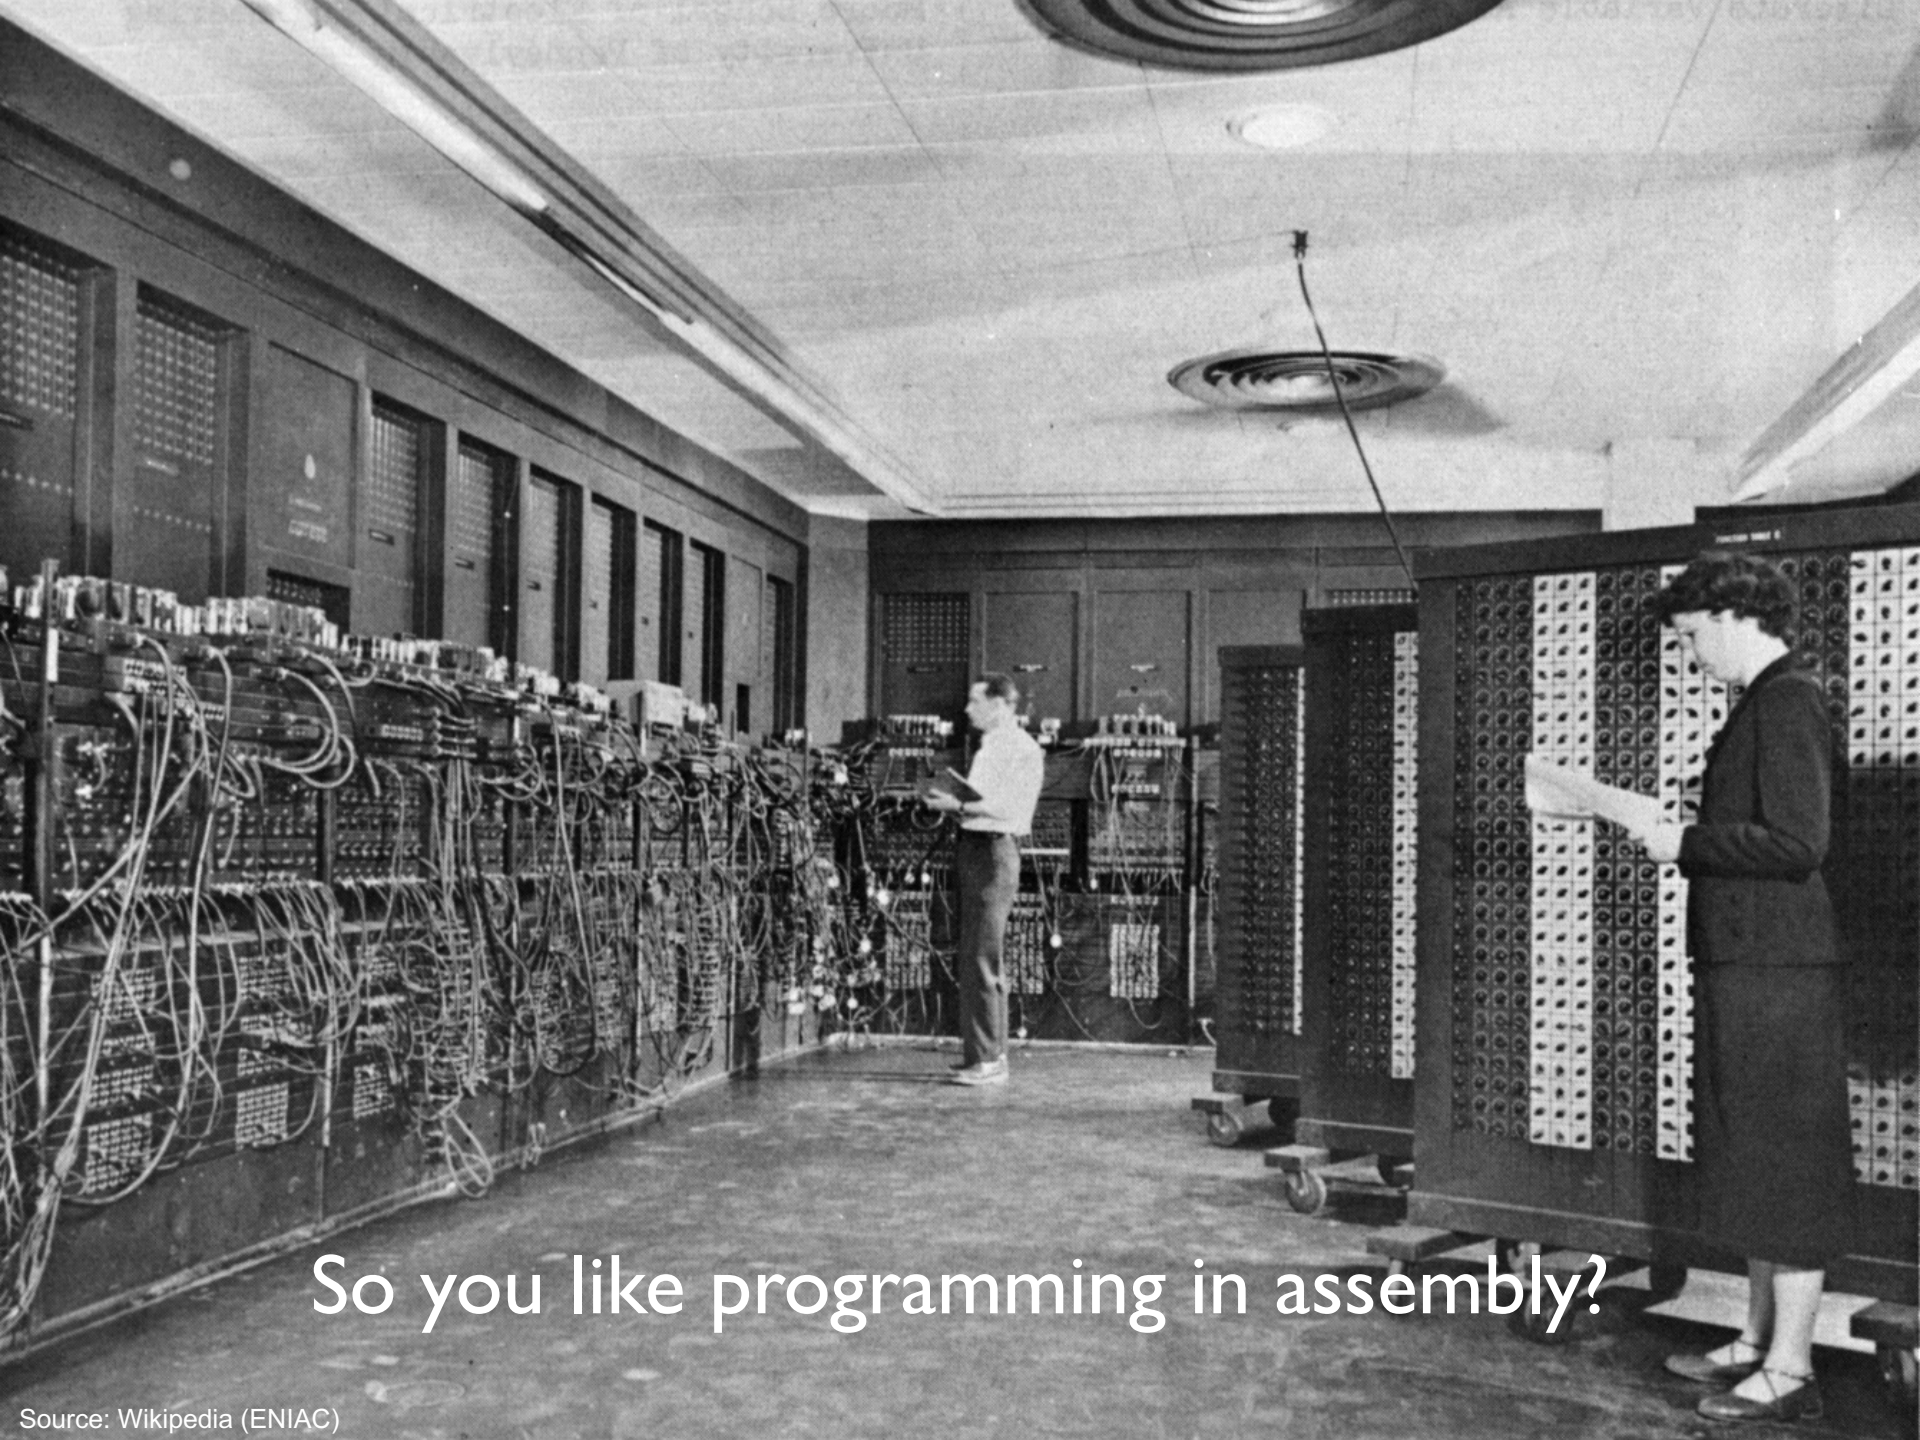

So you like programming in assembly?



Hadoop is great, but it's really waaaaay too low level!
(circa 2007)

What's the solution?

Design a higher-level language

Write a compiler

Hadoop is great, but it's really waaaaay too low level!
(circa 2007)



What we really need is SQL!

Answer:



What we really need is a
scripting language!

Answer:




facebook



SQL


Aside: Why not just
use a database?

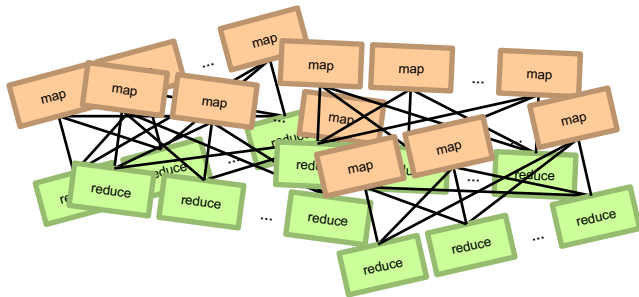

YAHOO!



Pig Scripts

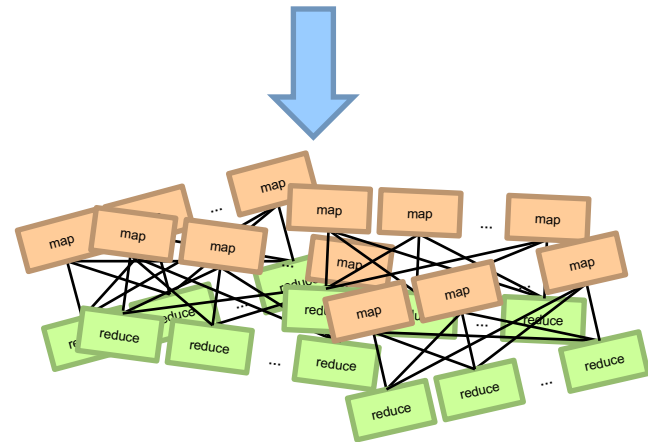

Both open-source projects today!

Story for another day....

facebook®

Jeff Hammerbacher, Information Platforms and the Rise of the Data Scientist.
In, *Beautiful Data*, O'Reilly, 2009.

“On the first day of logging the Facebook clickstream, more than 400 gigabytes of data was collected. The load, index, and aggregation processes for this data set really taxed the Oracle data warehouse. Even after significant tuning, we were unable to aggregate a day of clickstream data in less than 24 hours.”



Pig!

Pig: Example

Task: Find the top 10 most visited pages in each category

Visits

User	Url	Time
Amy	cnn.com	8:00
Amy	bbc.com	10:00
Amy	flickr.com	10:05
Fred	cnn.com	12:00



URL Info

Url	Category	PageRank
cnn.com	News	0.9
bbc.com	News	0.8
flickr.com	Photos	0.7
espn.com	Sports	0.9




Pig: Example Script


```
visits = load '/data/visits' as (user, url, time);
gVisits = group visits by url;
visitCounts = foreach gVisits generate url, count(visits);
urlInfo = load '/data/urlInfo' as (url, category, pRank);
visitCounts = join visitCounts by url, urlInfo by url;
gCategories = group visitCounts by category;
topUrls = foreach gCategories generate top(visitCounts,10);

store topUrls into '/data/topUrls';
```

Pig Query Plan

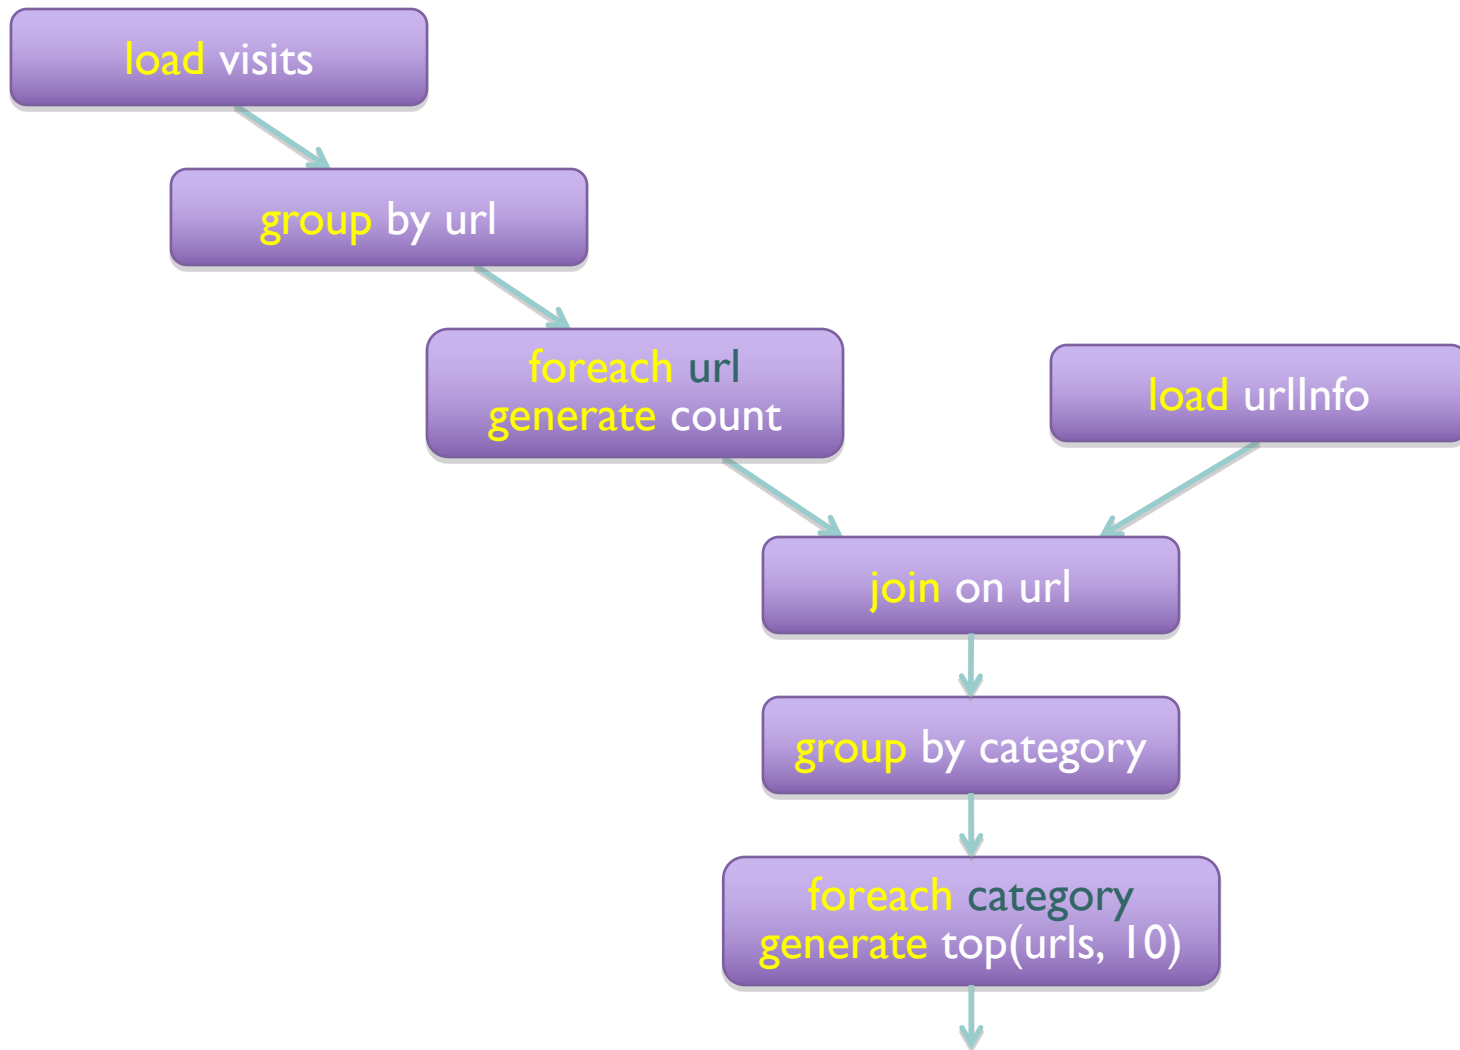

Pig: MapReduce Execution

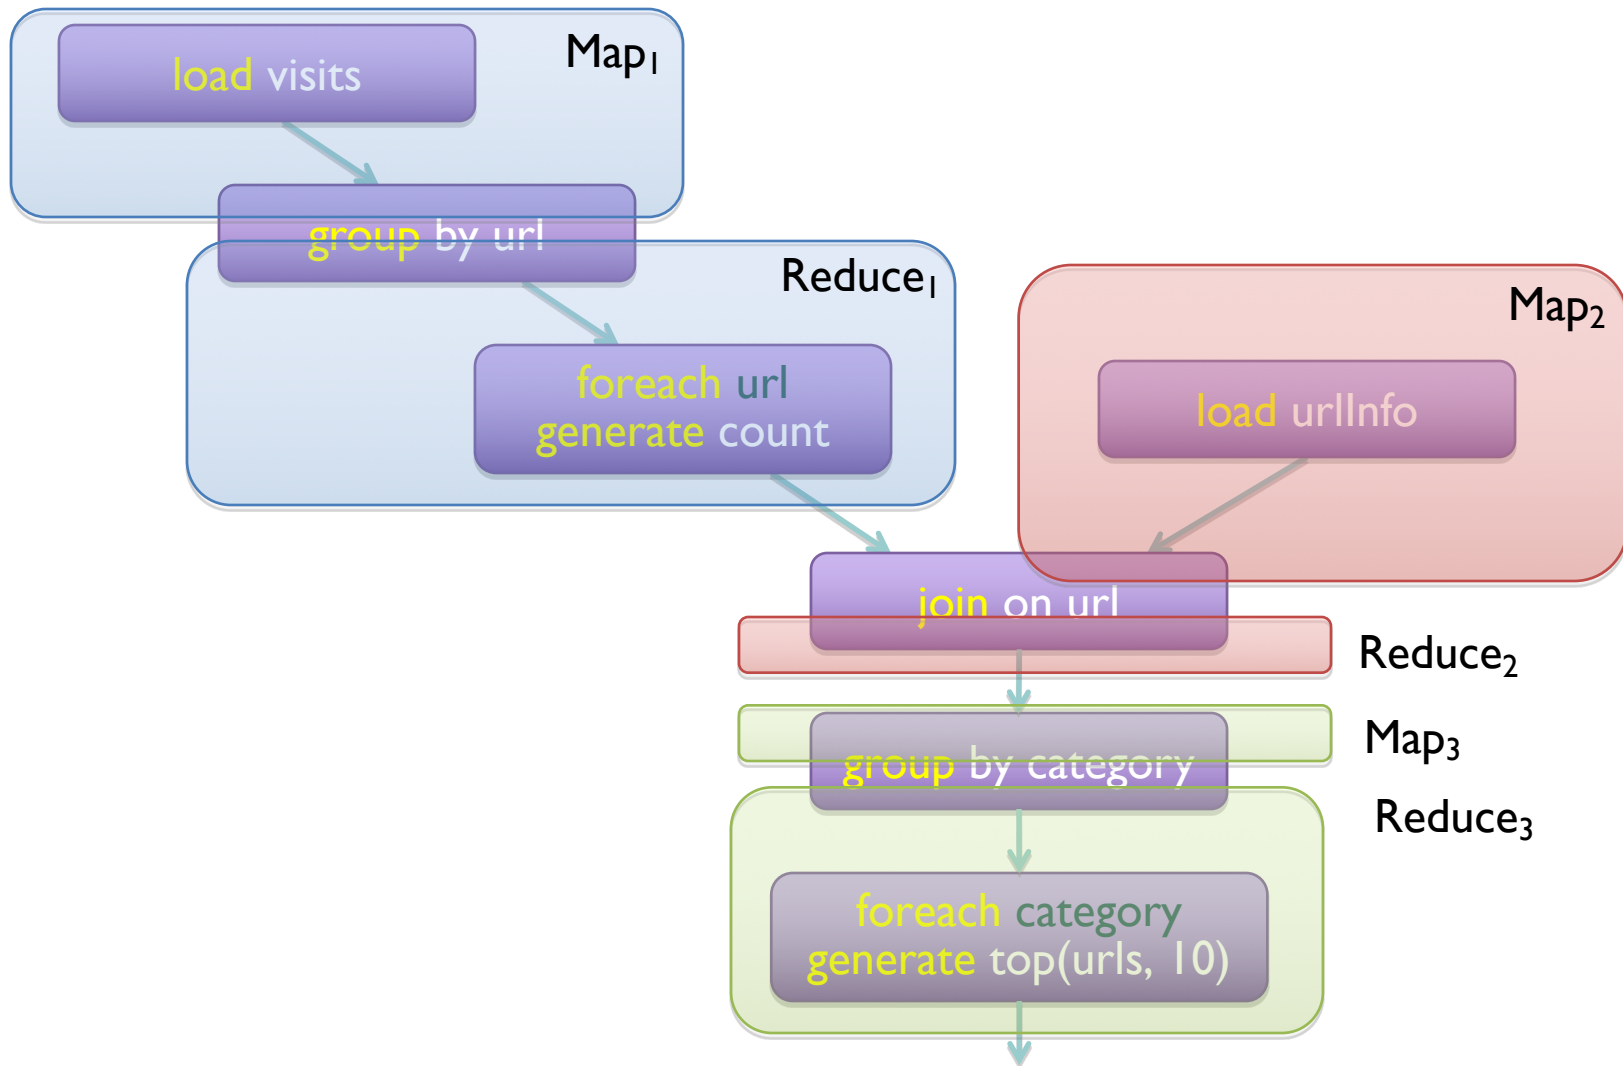


```
visits = load '/data/visits' as (user, url, time);
gVisits = group visits by url;
visitCounts = foreach gVisits generate url, count(visits);
urlInfo = load '/data/urlInfo' as (url, category, pRank);
visitCounts = join visitCounts by url, urlInfo by url;
gCategories = group visitCounts by category;
topUrls = foreach gCategories generate top(visitCounts,10);

store topUrls into '/data/topUrls';
```

This?

Or this?

```
import java.io.IOException;
import java.util.ArrayList;
import java.util.Iterator;
import java.util.List;

import org.apache.hadoop.fs.Path;
import org.apache.hadoop.io.LongWritable;
import org.apache.hadoop.io.Text;
import org.apache.hadoop.mapred.FileInputFormat;
import org.apache.hadoop.mapred.FileOutputFormat;
import org.apache.hadoop.mapred.JobConf;
import org.apache.hadoop.mapred.KeyValueTextInputFormat;
import org.apache.hadoop.mapred.Mapper;
import org.apache.hadoop.mapred.MapReduceBase;
import org.apache.hadoop.mapred.OutputCollector;
import org.apache.hadoop.mapred.RecordReader;
import org.apache.hadoop.mapred.Reducer;
import org.apache.hadoop.mapred.Reporter;
import org.apache.hadoop.mapred.SequenceFileInputFormat;
import org.apache.hadoop.mapred.SequenceFileOutputFormat;
import org.apache.hadoop.mapred.TextInputFormat;
import org.apache.hadoop.mapred.JobControl.JobControl;
import org.apache.hadoop.mapred.lib.IdentityMapper;

public class MRExample {
    public static class LoadPages extends MapReduceBase
        implements Mapper<LongWritable, Text, Text> {

        public void map(LongWritable k, Text val,
            OutputCollector<Text, Text> oc,
            Reporter reporter) throws IOException {
            // Pull the key out
            String line = val.toString();
            int firstComma = line.indexOf(',');
            String key = line.substring(0, firstComma);
            String value = line.substring(firstComma + 1);
            Text outKey = new Text(key);
            // Prepend an index to the value so we know which file
            // it came from.
            Text outVal = new Text("1" + value);
            oc.collect(outKey, outVal);
        }
    }

    public static class LoadAndFilterUsers extends MapReduceBase
        implements Mapper<LongWritable, Text, Text> {

        public void map(LongWritable k, Text val,
            OutputCollector<Text, Text> oc,
            Reporter reporter) throws IOException {
            // Pull the key out
            String line = val.toString();
            int firstComma = line.indexOf(',');
            String value = line.substring(
                firstComma + 1);
            int age = Integer.parseInt(value);
            if (age < 18 || age > 25) return;
            String key = line.substring(0, firstComma);
            Text outKey = new Text(key);
            // Prepend an index to the value so we know which file
            // it came from.
            Text outVal = new Text("2" + value);
            oc.collect(outKey, outVal);
        }
    }

    public static class Join extends MapReduceBase
        implements Reducer<Text, Text, Text> {

        public void reduce(Text key,
            Iterator<Text> iter,
            OutputCollector<Text, Text> oc,
            Reporter reporter) throws IOException {
            // For each value, figure out which file it's from and
            // Only output the first 100 records
            reporter.setStatus("OK");
        }

        // Do the cross product and collect the values
        for (String s1 : first) {
            for (String s2 : second) {
                String outval = key + "," + s1 + "," + s2;
                oc.collect(null, new Text(outval));
                reporter.setStatus("OK");
            }
        }
    }

    public static class LoadJoined extends MapReduceBase
        implements Mapper<Text, Text, Text, LongWritable> {

        public void map(
            Text k,
            Text val,
            OutputCollector<Text, LongWritable> oc,
            Reporter reporter) throws IOException {
            // Find the url
            String line = val.toString();
            int firstComma = line.indexOf(',');
            int secondComma = line.indexOf(',', firstComma);
            String key = line.substring(firstComma, secondComma);
            // drop the rest of the record, I don't need it anymore.
            // just pass a 1 for the combiner/reducer to sum instead.
            Text outKey = new Text(key);
            oc.collect(outKey, new LongWritable(1L));
        }
    }

    public static class ReduceUrls extends MapReduceBase
        implements Reducer<Text, LongWritable, WritableComparable,
            Writable> {

        public void reduce(
            Text key,
            Iterator<LongWritable> iter,
            OutputCollector<WritableComparable, Writable> oc,
            Reporter reporter) throws IOException {
            // Add up all the values we see
            long sum = 0;
            while (iter.hasNext()) {
                sum += iter.next().get();
                reporter.setStatus("OK");
            }
            oc.collect(key, new LongWritable(sum));
        }
    }

    public static class LoadClicks extends MapReduceBase
        implements Mapper<WritableComparable, Writable, LongWritable,
            Text> {

        public void map(
            WritableComparable key,
            Writable val,
            OutputCollector<LongWritable, Text> oc,
            Reporter reporter) throws IOException {
            oc.collect((LongWritable)val, (Text)key);
        }
    }

    public static class LimitClicks extends MapReduceBase
        implements Reducer<LongWritable, Text, LongWritable, Text> {

        int count = 0;
        public void reduce(
            LongWritable key,
            Iterator<Text> iter,
            OutputCollector<LongWritable, Text> oc,
            Reporter reporter) throws IOException {
            // Only output the first 100 records
        }
    }

    Ip.setOutputKeyClass(Text.class);
    Ip.setOutputValueClass(Text.class);
    Ip.setMapperClass(LoadPages.class);
    FileInputFormat.addInputPath(Ip, new
        Path("/user/gates/pages"));
    FileOutputFormat.setOutputPath(Ip,
        new Path("/user/gates/tmp/indexed_pages"));
    Ip.setNumReduceTasks(0);
    Job loadPages = new Job(Ip);

    JobConf ifu = new JobConf(MRExample.class);
    ifu.setJobName("Load and Filter Users");
    ifu.setInputFormat(TextInputFormat.class);
    ifu.setOutputKeyClass(Text.class);
    ifu.setOutputValueClass(Text.class);
    ifu.setMapperClass(LoadAndFilterUsers.class);
    FileInputFormat.addInputPath(ifu, new
        Path("/user/gates/users"));
    FileOutputFormat.setOutputPath(ifu,
        new Path("/user/gates/tmp/filtered_users"));
    ifu.setNumReduceTasks(0);
    Job loadUsers = new Job(ifu);

    JobConf join = new JobConf(MRExample.class);
    join.setJobName("Join Users and Pages");
    join.setInputFormat(KeyValueTextInputFormat.class);
    join.setOutputKeyClass(Text.class);
    join.setOutputValueClass(Text.class);
    join.setMapperClass(IdentityMapper.class);
    join.setReducerClass(Join.class);
    FileInputFormat.addInputPath(join, new
        Path("/user/gates/tmp/indexed_pages"));
    FileInputFormat.addInputPath(join, new
        Path("/user/gates/tmp/filtered_users"));
    FileOutputFormat.setOutputPath(join, new
        Path("/user/gates/tmp/joined"));
    join.setNumReduceTasks(50);
    Job joinJob = new Job(join);
    joinJob.addDependingJob(loadPages);
    joinJob.addDependingJob(loadUsers);

    JobConf group = new JobConf(MRExample.class);
    group.setJobName("Group URLs");
    group.setInputFormat(KeyValueTextInputFormat.class);
    group.setOutputKeyClass(Text.class);
    group.setOutputValueClass(LongWritable.class);
    group.setOutputFormat(SequenceFileOutputFormat.class);
    group.setMapperClass(LoadJoined.class);
    group.setCombinerClass(ReduceUrls.class);
    group.setReducerClass(ReduceUrls.class);
    FileInputFormat.addInputPath(group, new
        Path("/user/gates/tmp/joined"));
    FileOutputFormat.setOutputPath(group, new
        Path("/user/gates/tmp/grouped"));
    group.setNumReduceTasks(50);
    Job groupJob = new Job(group);
    groupJob.addDependingJob(joinJob);

    JobConf top100 = new JobConf(MRExample.class);
    top100.setJobName("Top 100 sites");
    top100.setInputFormat(SequenceFileInputFormat.class);
    top100.setOutputKeyClass(LongWritable.class);
    top100.setOutputValueClass(Text.class);
    top100.setOutputFormat(SequenceFileOutputFormat.class);
    top100.setMapperClass(LoadClicks.class);
    top100.setCombinerClass(LimitClicks.class);
    top100.setReducerClass(LimitClicks.class);
    FileInputFormat.addInputPath(top100, new
        Path("/user/gates/tmp/grouped"));
    FileOutputFormat.setOutputPath(top100, new
        Path("/user/gates/top100sitesforusers8to25"));
    top100.setNumReduceTasks(1);
    Job limit = new Job(top100);
    limit.addDependingJob(groupJob);
}
```

But isn't Pig slower?

Sure, but c can be slower than assembly too...



Pig: Basics

Sequence of statements manipulating relations (aliases)

Data model

atoms

tuples

bags

maps

json

Pig: Common Operations

LOAD: load data (from HDFS)

FOREACH ... GENERATE: per tuple processing

FILTER: discard unwanted tuples “map”

“reduce” GROUP/COGROUP: group tuples

JOIN: relational join

STORE: store data (to HDFS)

Pig: GROUPing

```
A = LOAD 'myfile.txt' AS (f1: int, f2: int, f3: int);
```

```
(1, 2, 3)
```

```
(4, 2, 1)
```

```
(8, 3, 4)
```

```
(4, 3, 3)
```

```
(7, 2, 5)
```

```
(8, 4, 3)
```

```
X = GROUP A BY f1;
```

```
(1, {(1, 2, 3)})
```

```
(4, {(4, 2, 1), (4, 3, 3)})
```

```
(7, {(7, 2, 5)})
```

```
(8, {(8, 3, 4), (8, 4, 3)})
```

Pig: COGROUPing

A:

(1, 2, 3)
(4, 2, 1)
(8, 3, 4)
(4, 3, 3)
(7, 2, 5)
(8, 4, 3)

B:

(2, 4)
(8, 9)
(1, 3)
(2, 7)
(2, 9)
(4, 6)
(4, 9)

X = COGROUP A BY \$0, B BY \$0;

(1, {(1, 2, 3)}, {(1, 3)})
(2, {}, {(2, 4), (2, 7), (2, 9)})
(4, {(4, 2, 1), (4, 3, 3)}, {(4, 6), (4, 9)})
(7, {(7, 2, 5)}, {})
(8, {(8, 3, 4), (8, 4, 3)}, {(8, 9)})

Pig: JOINing

A:

(1, 2, 3)
(4, 2, 1)
(8, 3, 4)
(4, 3, 3)
(7, 2, 5)
(8, 4, 3)

B:

(2, 4)
(8, 9)
(1, 3)
(2, 7)
(2, 9)
(4, 6)
(4, 9)

`X = JOIN A BY $0, B BY $0;`

(1,2,3,1,3)
(4,2,1,4,6)
(4,3,3,4,6)
(4,2,1,4,9)
(4,3,3,4,9)
(8,3,4,8,9)
(8,4,3,8,9)

Pig UDFs


User-defined functions:

Java
Python
JavaScript
Ruby
...

UDFs make Pig arbitrarily extensible

Express “core” computations in UDFs



Take advantage of Pig as glue code for scale-out plumbing

An aerial photograph of a large industrial facility, likely a datacenter, situated in a rural area. The facility consists of several large, white, rectangular buildings with flat roofs, arranged in a grid-like pattern. In the foreground, there is a large parking lot filled with many white semi-trailers. To the right, a large building with a complex roof structure, possibly a power plant or cooling system, is visible. The surrounding landscape is a mix of green fields and brown, tilled soil. In the background, a line of trees and a small town or village can be seen. The sky is a gradient of orange and yellow, with a bright sun low on the horizon in the upper left corner.

The datacenter *is* the computer!

What's the instruction set?
Okay, let's fix this!

Analogy: NAND Gates are universal

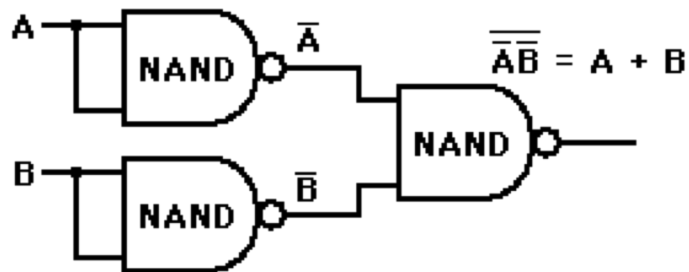

Let's design a data processing
language “from scratch”!

What ops do you need?


(Why is MapReduce the way it is?)

Data-Parallel Dataflow Languages

We have a collection of **records**,
want to apply a bunch of operations
to compute some result

Assumption: static collection of records
(what's the limitation here?)

We need per-record processing

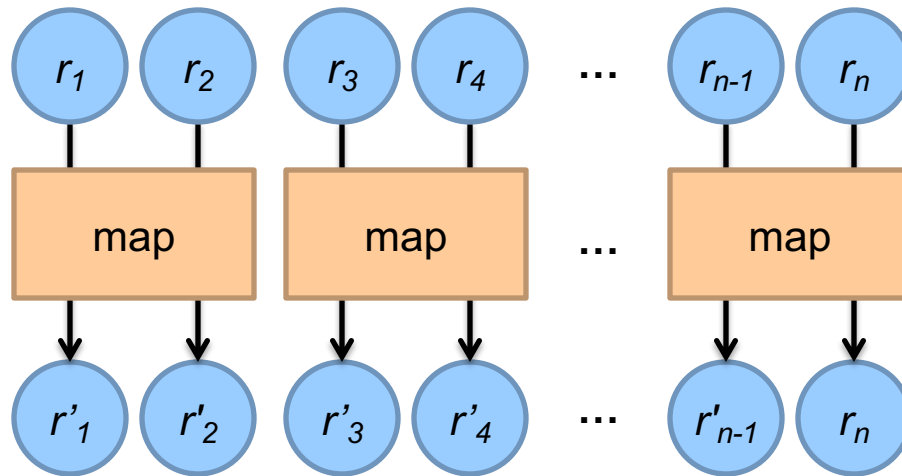

Remarks: Easy to parallelize maps,
record to “mapper” assignment is an implementation detail

Map alone isn't enough

(If we want more than embarrassingly parallel processing)

Where do intermediate results go?

We need an addressing mechanism!


What's the semantics of the group by?

Once we resolve the addressing, apply another computation

That's what we call reduce!


(What's with the sorting then?)

MapReduce

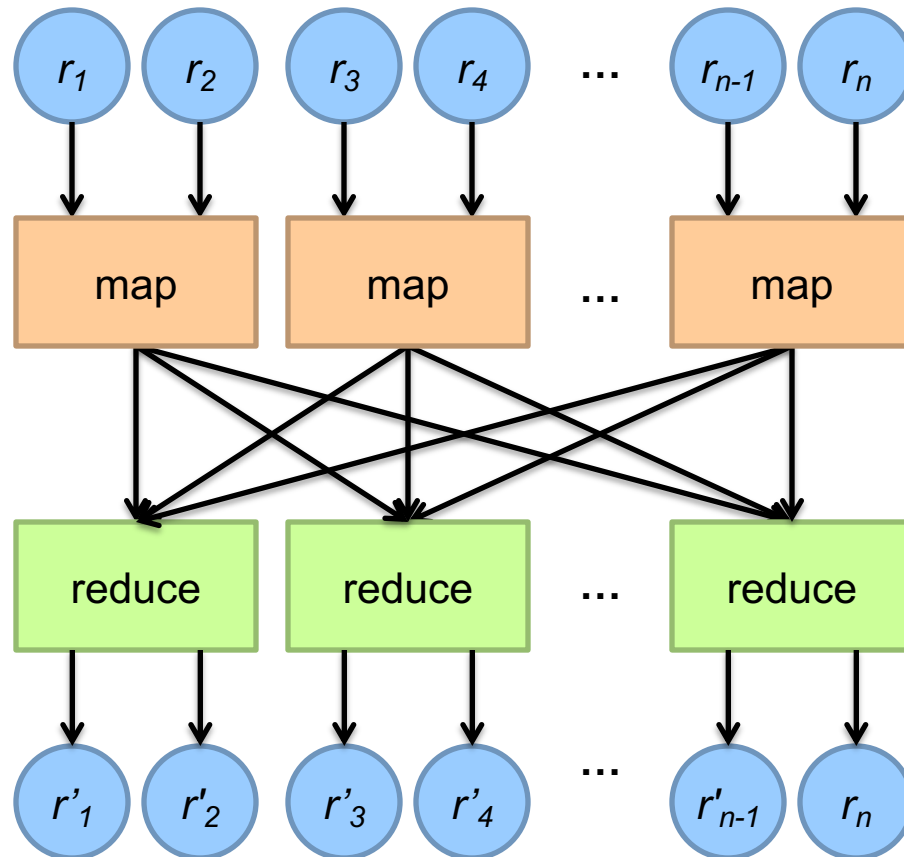


MapReduce is the minimally “interesting” dataflow!

MapReduce

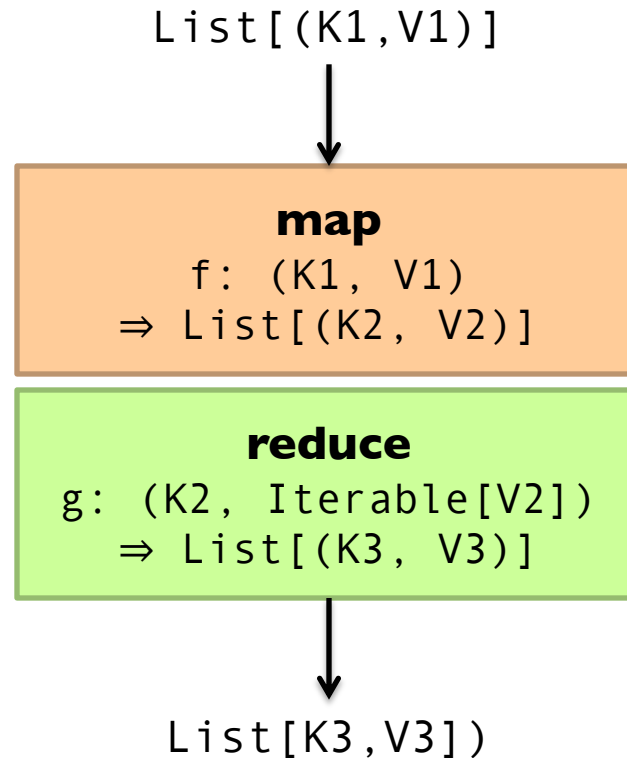



(note we're abstracting the “data-parallel” part)

MapReduce Workflows

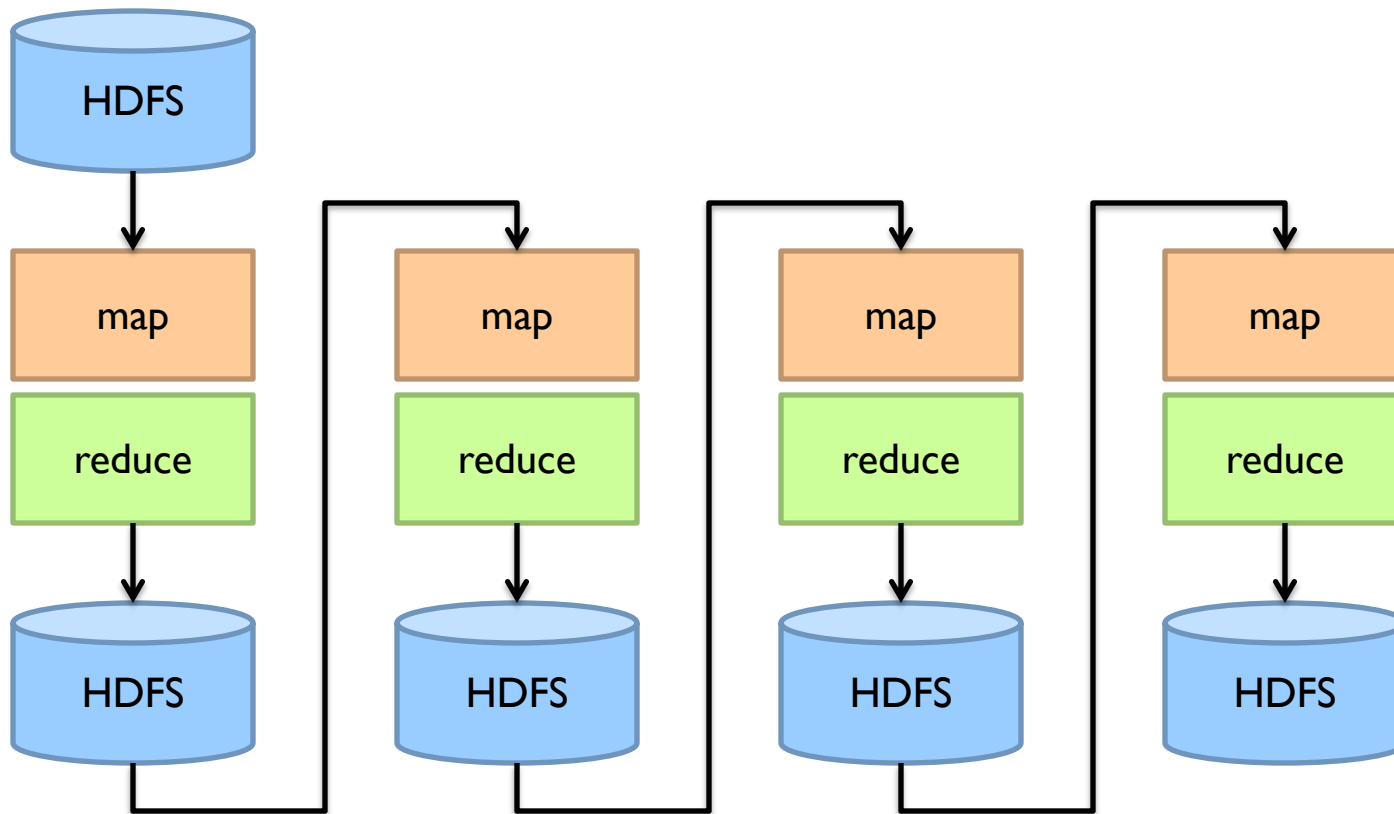



What's wrong?

Want MM?

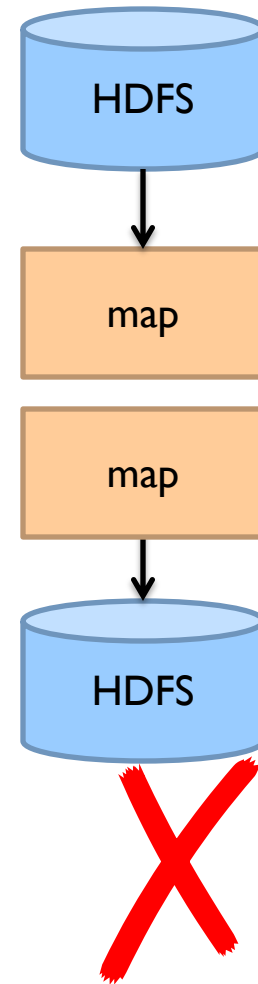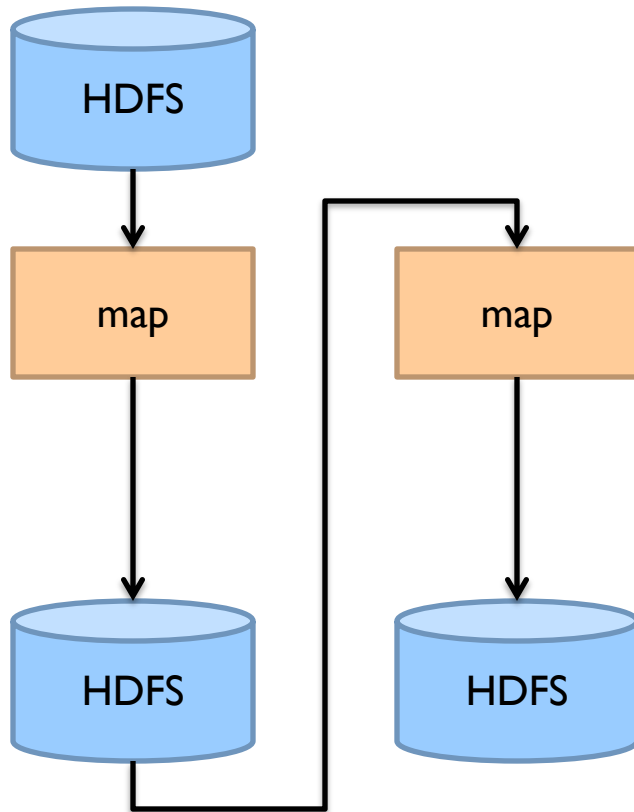


Want MRR?

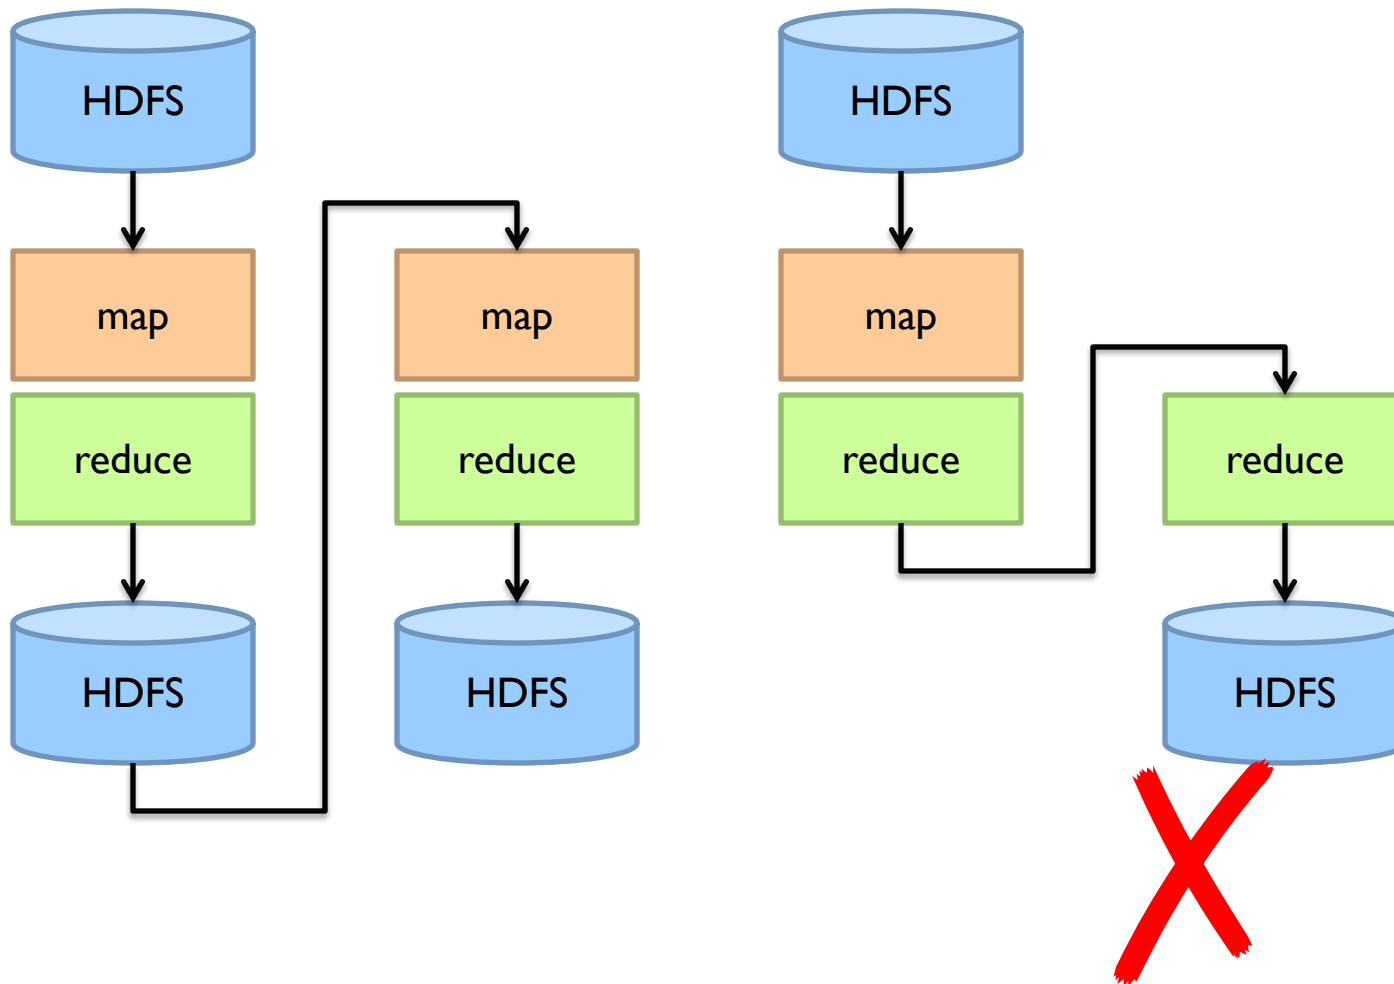


An aerial photograph of a large industrial facility, likely a datacenter, situated in a rural area. The facility consists of several large, white, rectangular buildings with flat roofs, arranged in a grid-like pattern. In the foreground, there is a large parking lot filled with many white semi-trailers. To the right, a large building with a complex roof structure, possibly a power plant or cooling system, is visible. The surrounding landscape is a mix of green fields and brown, tilled soil. In the background, a line of trees and distant hills are visible under a sky with a bright, low sun, creating a warm, orange glow.

The datacenter *is* the computer!
Let's enrich the instruction set!

Dryad: Graph Operators

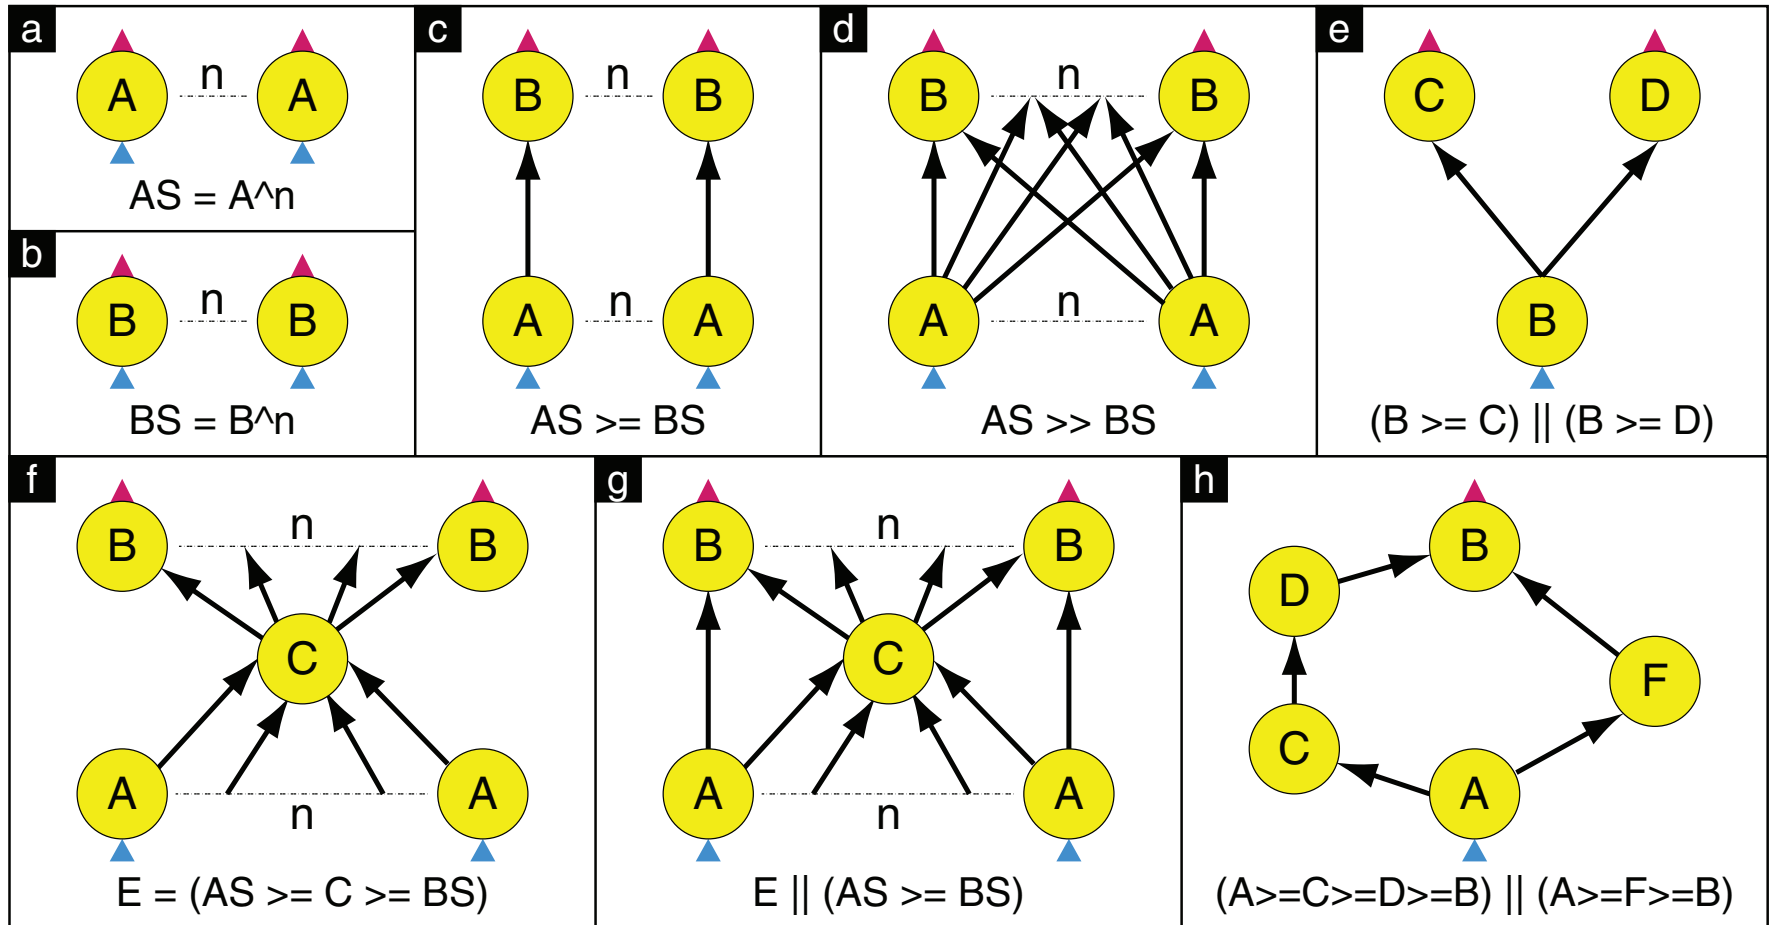

Dryad: Architecture

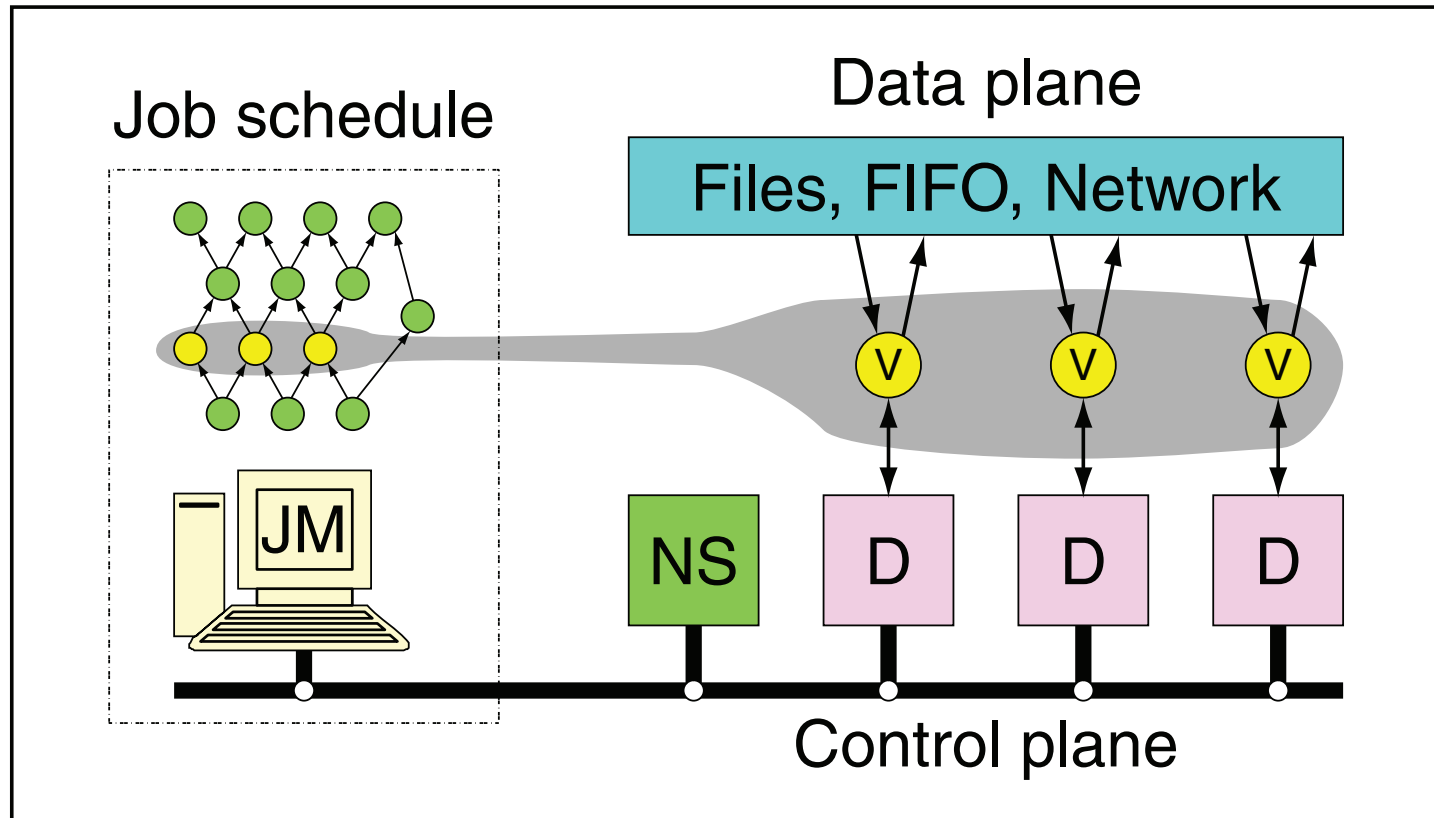

The Dryad system organization. The job manager (JM) consults the name server (NS) to discover the list of available computers. It maintains the job graph and schedules running vertices (V) as computers become available using the daemon (D) as a proxy. Vertices exchange data through files, TCP pipes, or shared-memory channels. The shaded bar indicates the vertices in the job that are currently running.

Dryad: Cool Tricks

Channel: abstraction for vertex-to-vertex communication

File

TCP pipe


Shared memory

Runtime graph refinement

Size of input is not known until runtime

Automatically rewrite graph based on invariant properties

Dryad: Sample Program

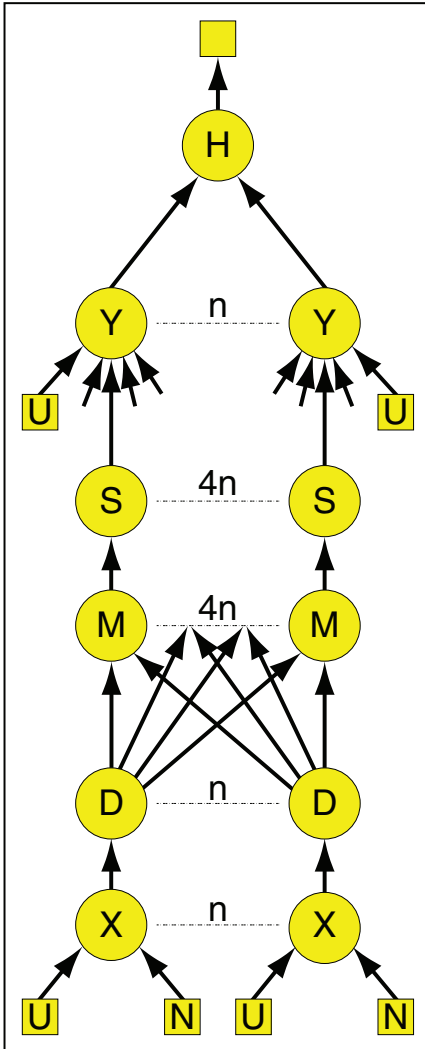

```

GraphBuilder XSet = moduleX^N;
GraphBuilder DSet = moduleD^N;
GraphBuilder MSet = moduleM^(N*4);
GraphBuilder SSet = moduleS^(N*4);
GraphBuilder YSet = moduleY^N;
GraphBuilder HSet = moduleH^1;

GraphBuilder XInputs = (ugriz1 >= XSet) || (neighbor >= XSet);
GraphBuilder YInputs = ugriz2 >= YSet;

GraphBuilder XToY = XSet >= DSet >> MSet >= SSet;
for (i = 0; i < N*4; ++i)
{
    XToY = XToY || (SSet.GetVertex(i) >= YSet.GetVertex(i/4));
}

GraphBuilder YToH = YSet >= HSet;
GraphBuilder HOutputs = HSet >= output;

GraphBuilder final = XInputs || YInputs || XToY || YToH || HOutputs;
    
```


DryadLINQ

LINQ = Language INtegrated Query

.NET constructs for combining imperative and declarative programming

Developers write in DryadLINQ

Program compiled into computations that run on Dryad

Sound familiar?

What's the solution?

Design a higher-level language

Write a compiler

DryadLINQ: Word Count


```
PartitionedTable<LineRecord> inputTable =  
    PartitionedTable.Get<LineRecord>(uri);  
  
IQueryable<string> words = inputTable.SelectMany(x => x.line.Split(' '));  
IQueryable<IGrouping<string, string>> groups = words.GroupBy(x => x);  
IQueryable<Pair> counts = groups.Select(x => new Pair(x.Key, x.Count()));  
IQueryable<Pair> ordered = counts.OrderByDescending(x => x.Count);  
IQueryable<Pair> top = ordered.Take(k);
```

Compare:

```
a = load 'file.txt' as (text: chararray);  
b = foreach a generate flatten(TOKENIZE(text)) as term;  
c = group b by term;  
d = foreach c generate group as term, COUNT(b) as count;  
  
store d into 'cnt';
```

Compare and contrast...

What happened to Dryad?

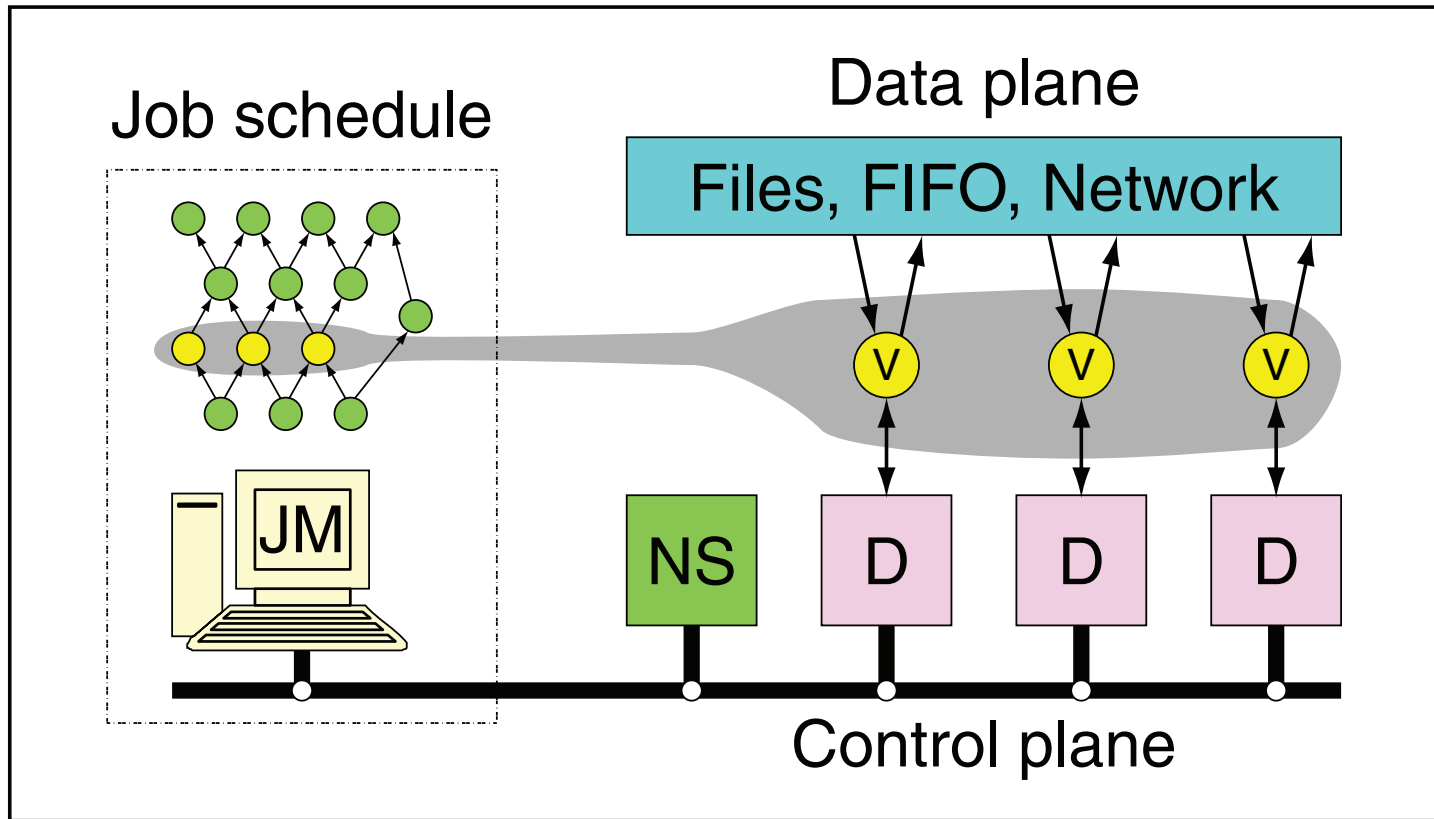

The Dryad system organization. The job manager (JM) consults the name server (NS) to discover the list of available computers. It maintains the job graph and schedules running vertices (V) as computers become available using the daemon (D) as a proxy. Vertices exchange data through files, TCP pipes, or shared-memory channels. The shaded bar indicates the vertices in the job that are currently running.

Data-Parallel Dataflow Languages

We have a collection of **records**,
want to apply a bunch of operations
to compute some result

What are the dataflow operators?

Spark

Answer to “What’s beyond MapReduce?”

Brief history:


Developed at UC Berkeley AMPLab in 2009

Open-sourced in 2010

Became top-level Apache project in February 2014

Commercial support provided by DataBricks

Spark vs. Hadoop

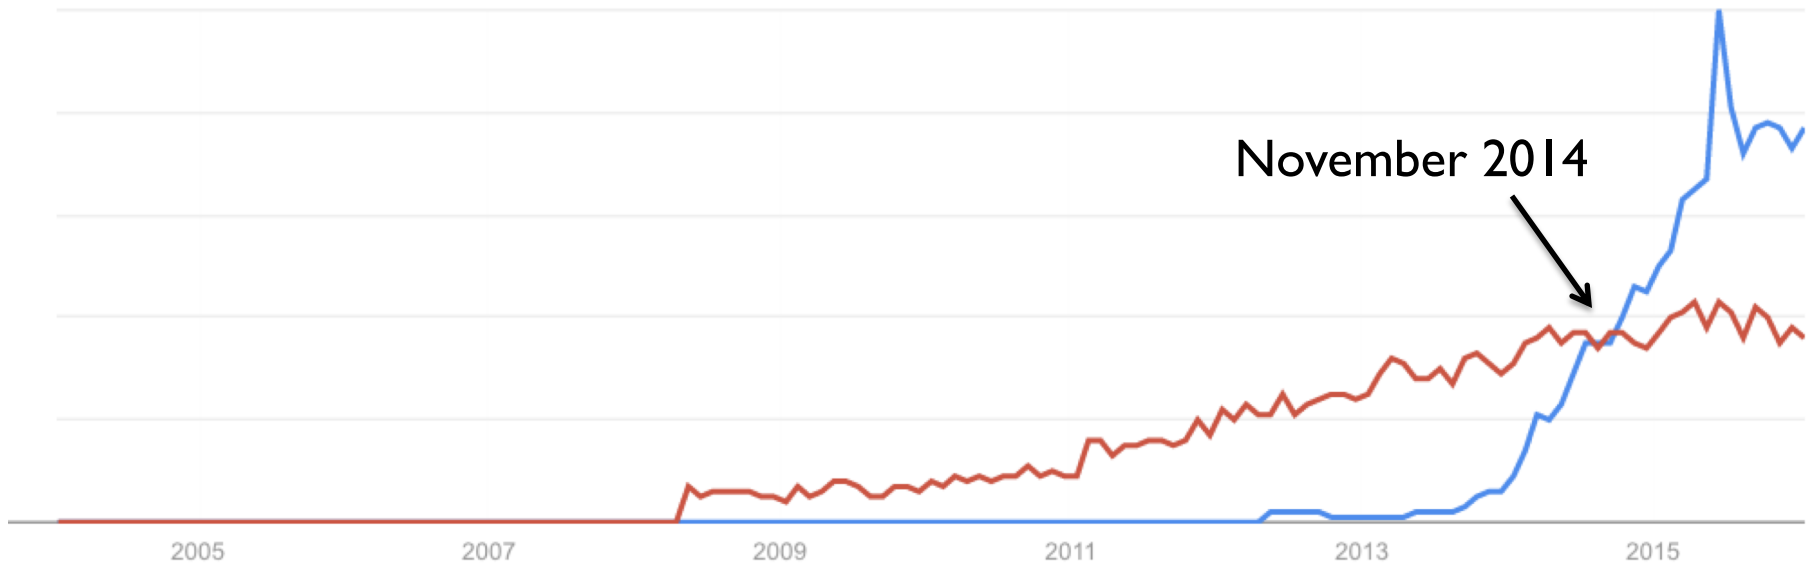


Google Trends

What's an RDD?


Resilient Distributed Dataset (RDD)

Much more next session...

MapReduce

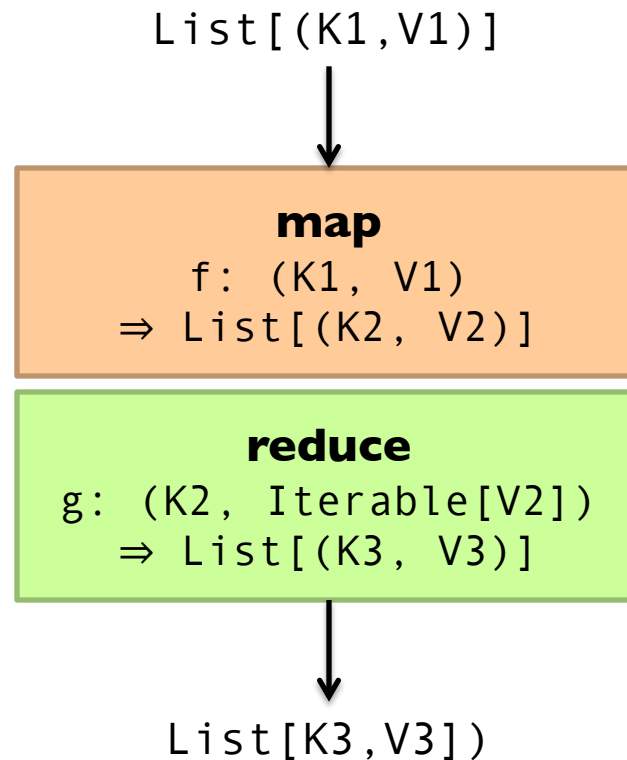


Map-like Operations

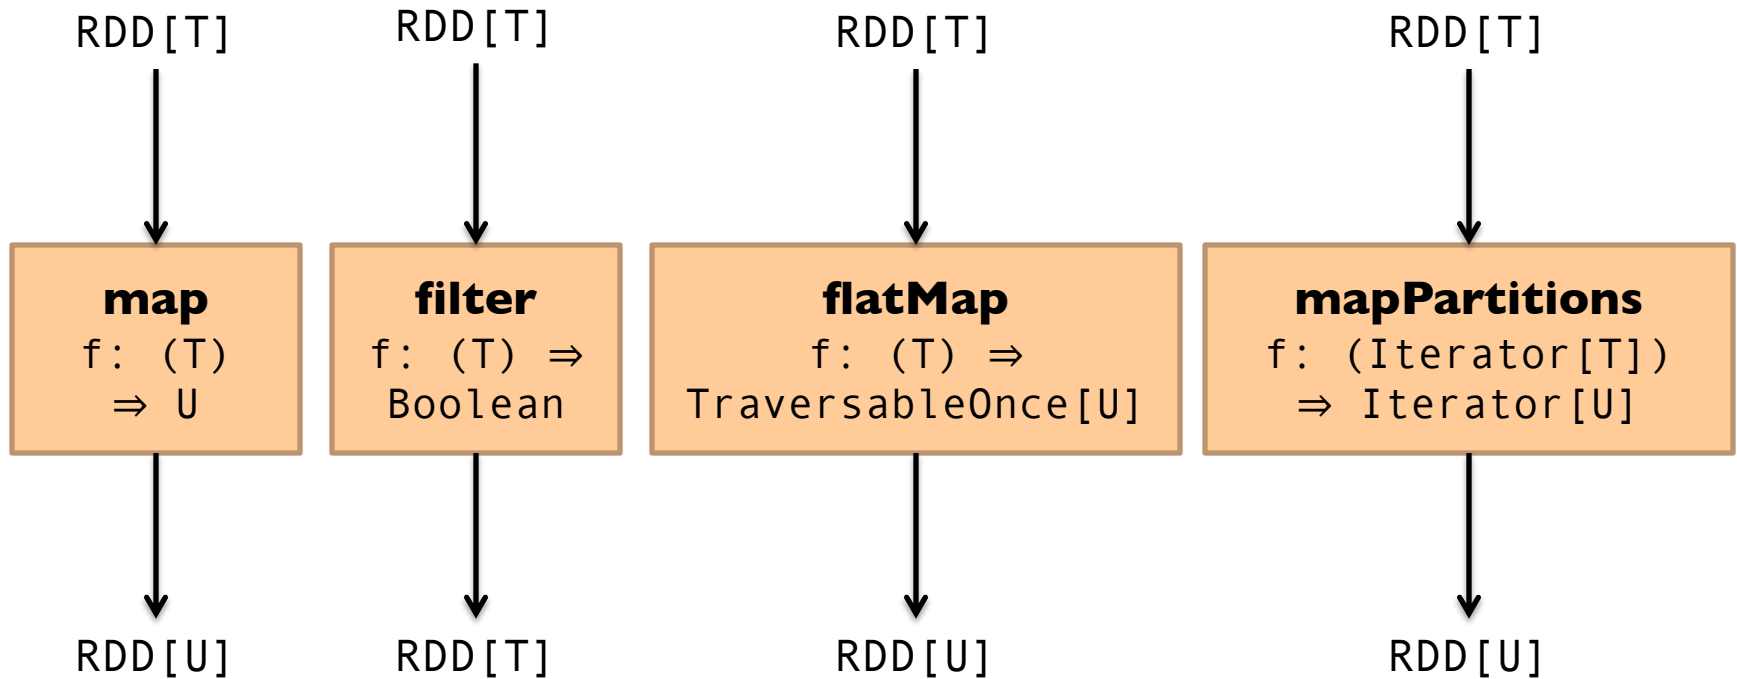


(Not meant to be exhaustive)

Reduce-like Operations

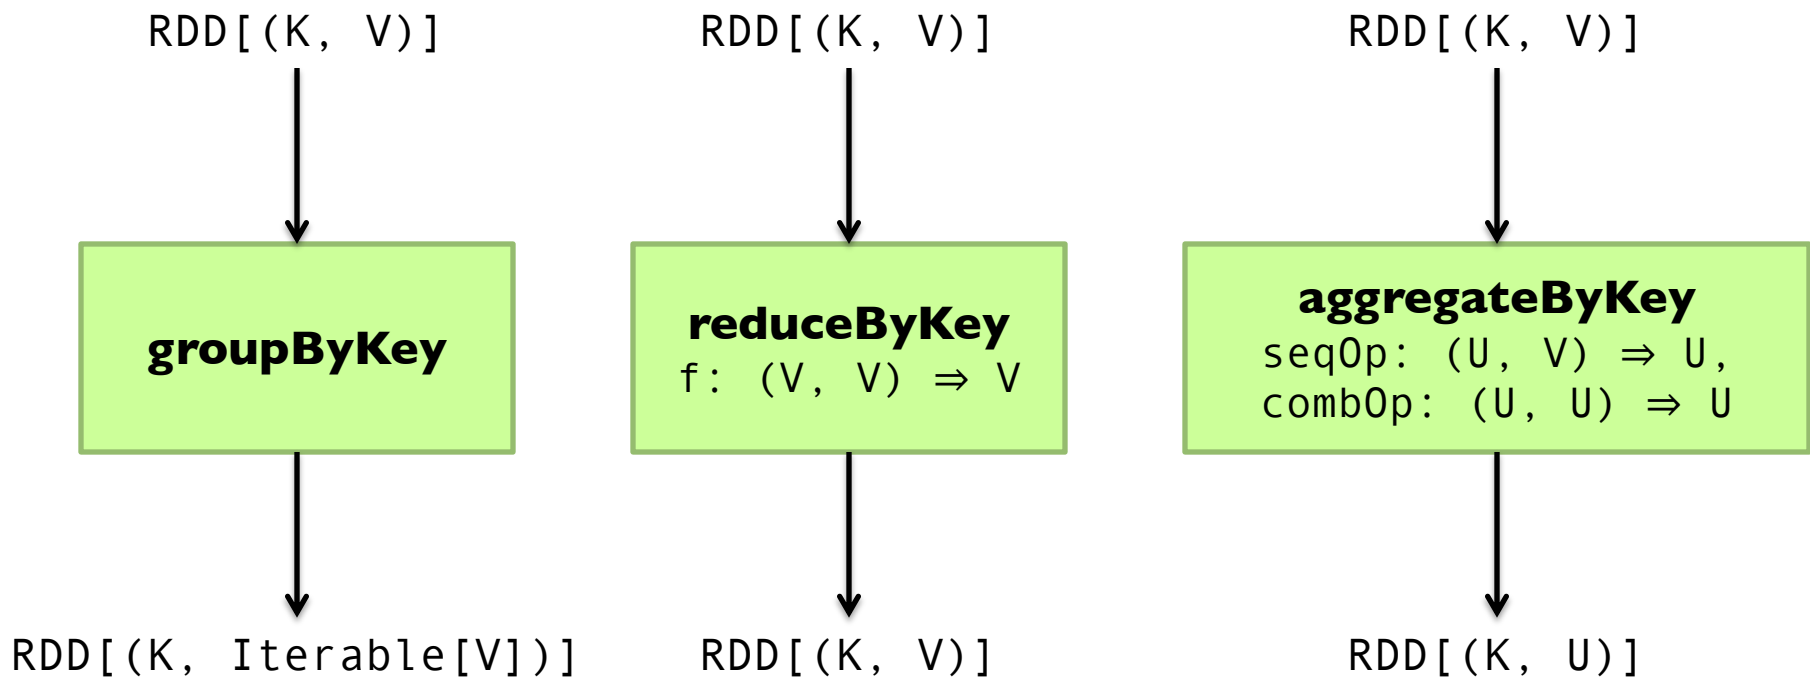



(Not meant to be exhaustive)

Sort Operations

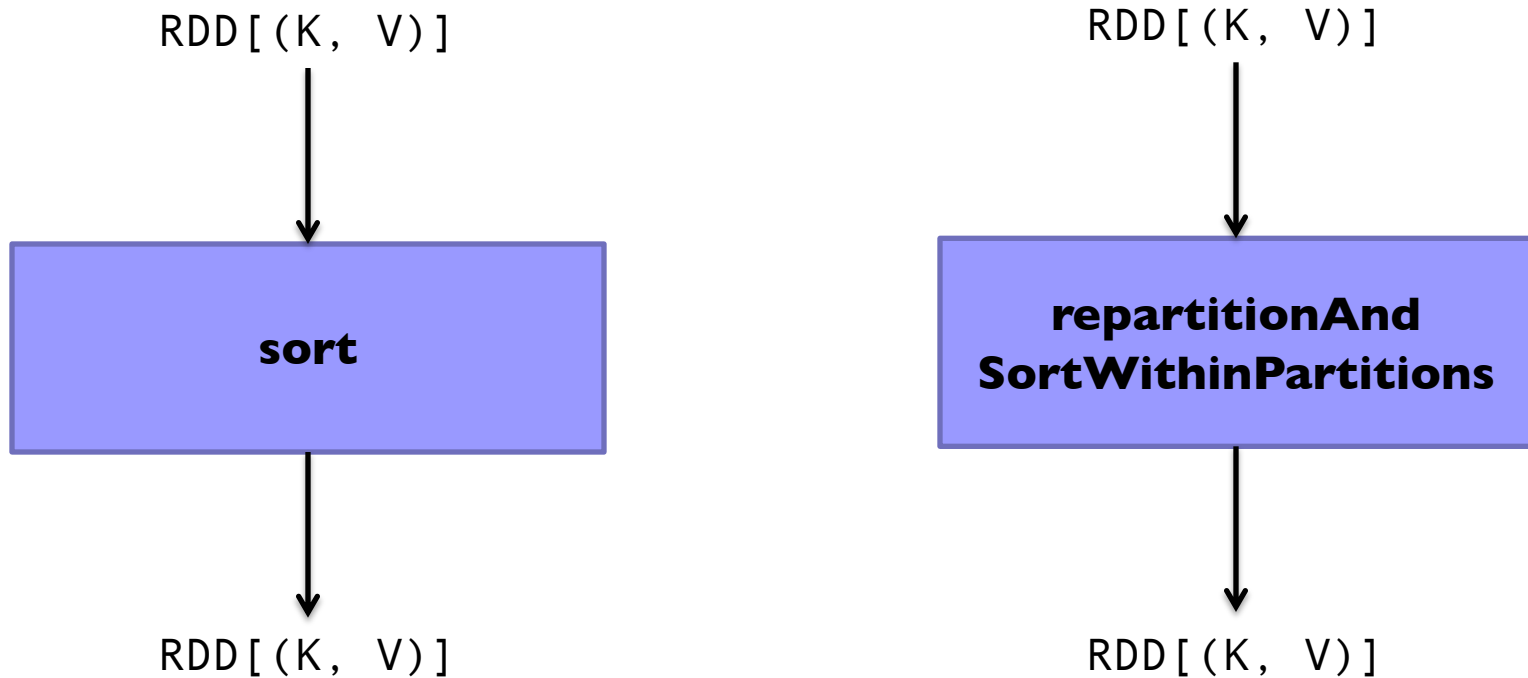



(Not meant to be exhaustive)

Join-like Operations

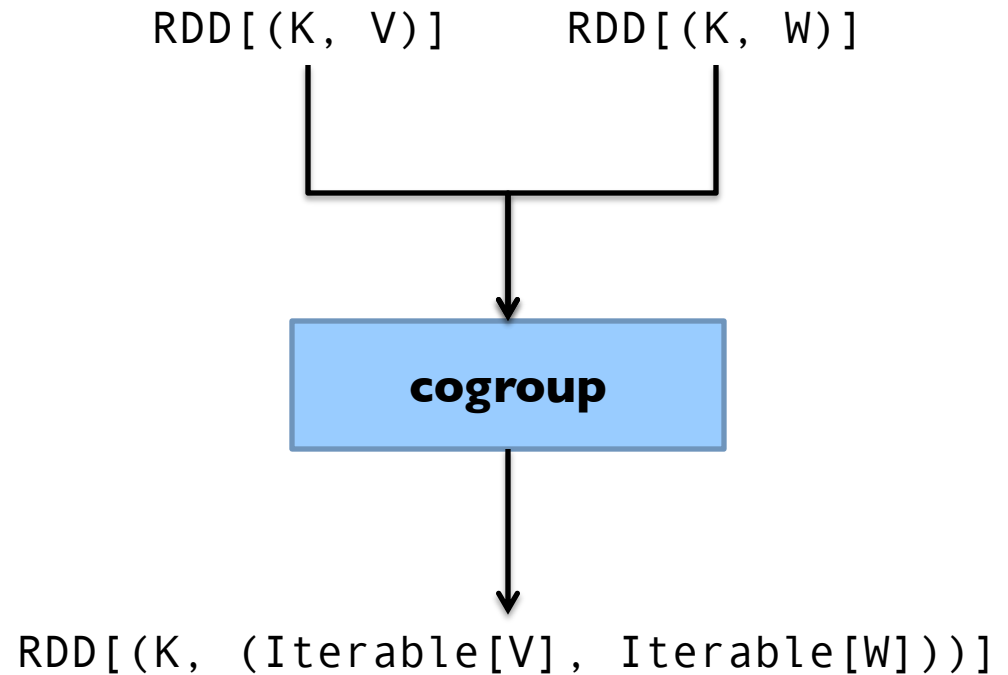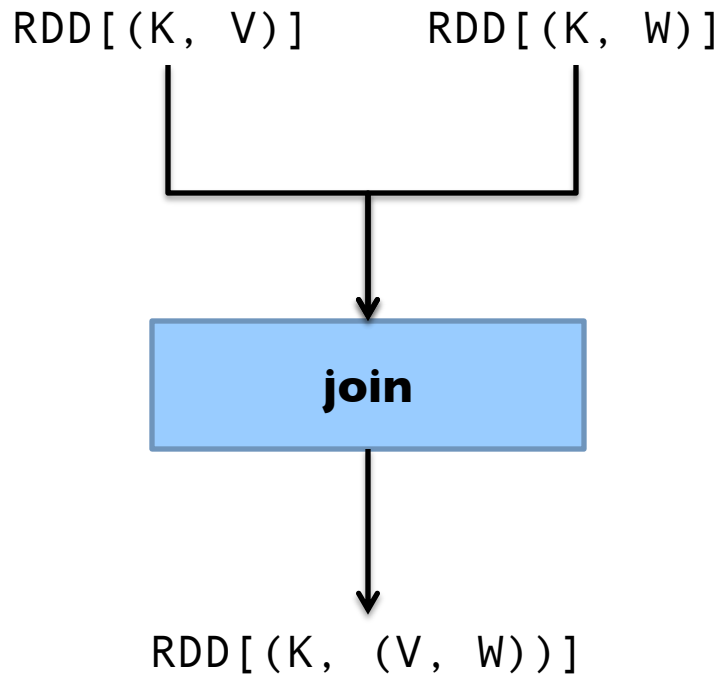



(Not meant to be exhaustive)

Join-like Operations

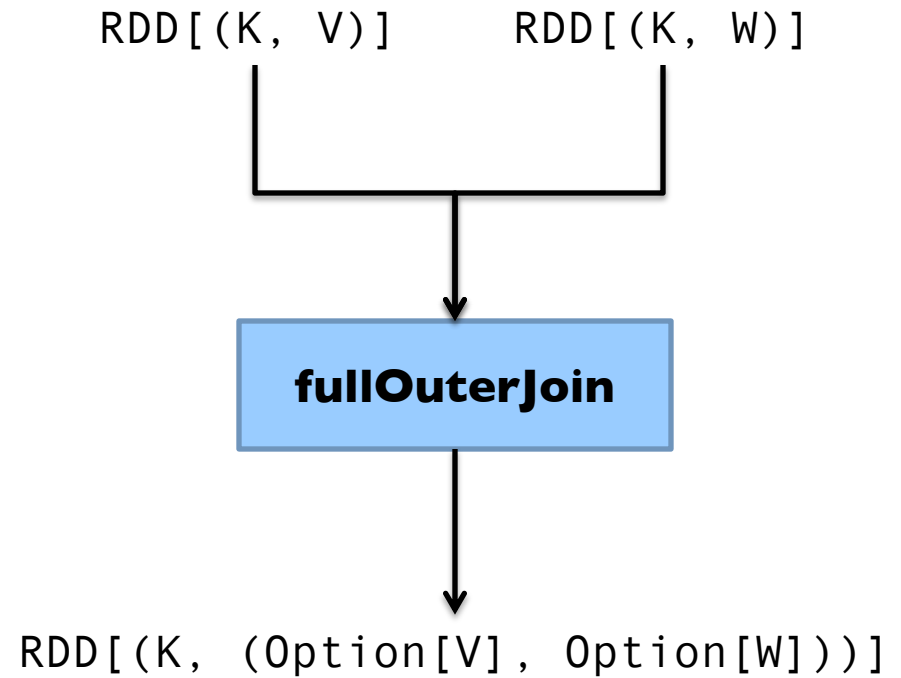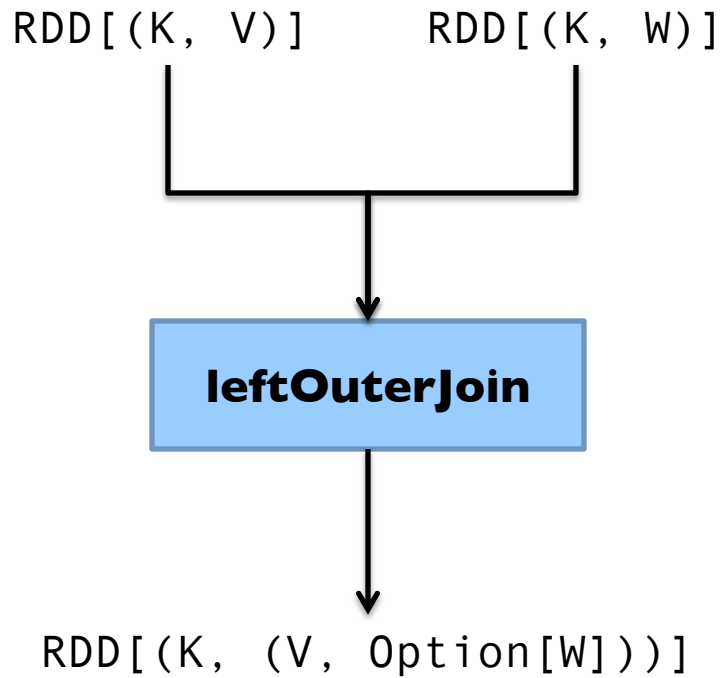


(Not meant to be exhaustive)

Set-ish Operations

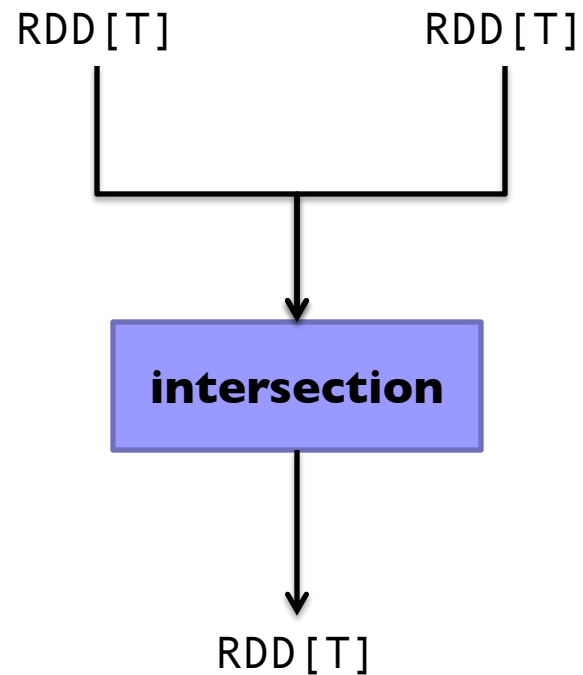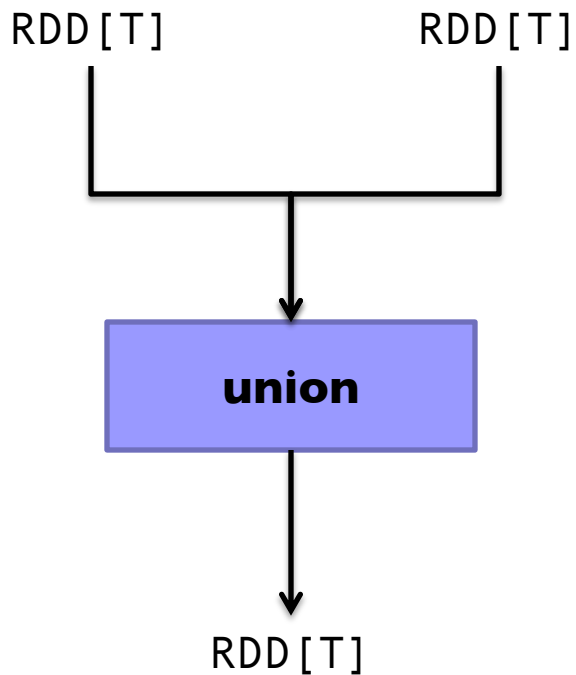


(Not meant to be exhaustive)

Set-ish Operations

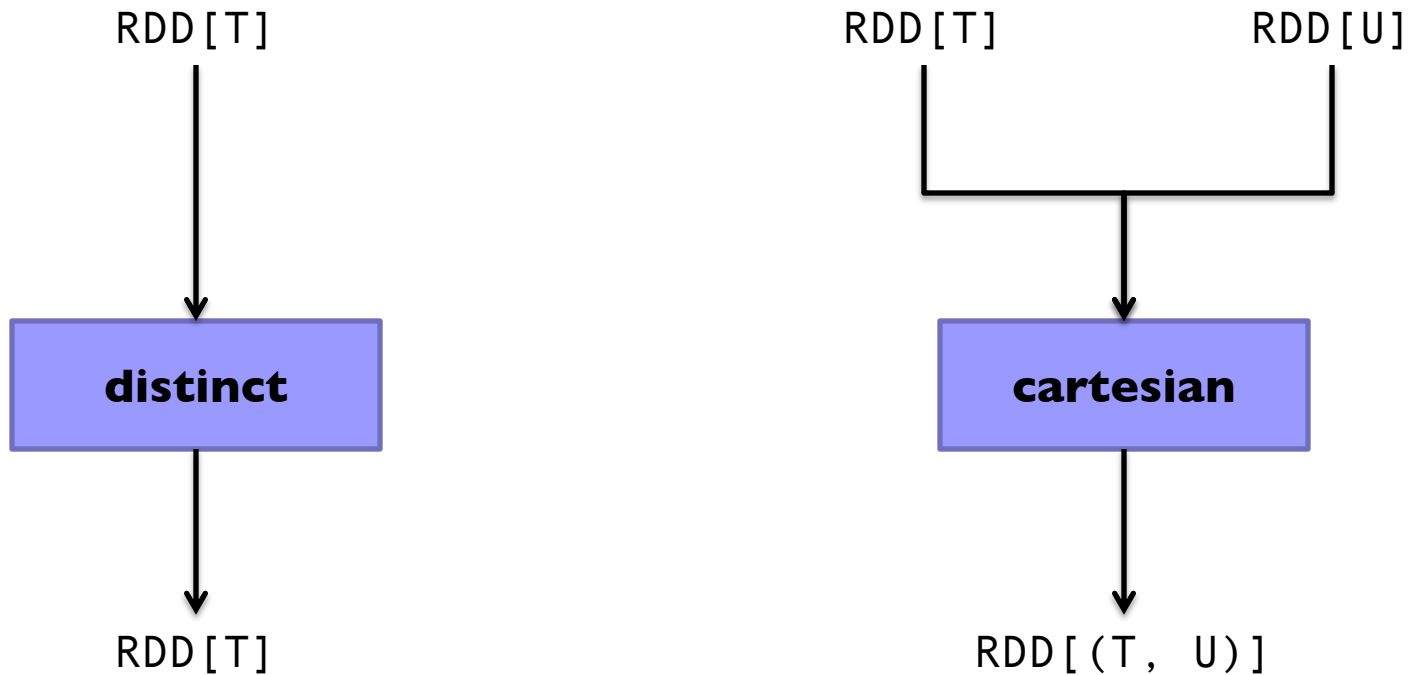


(Not meant to be exhaustive)

MapReduce in Spark?

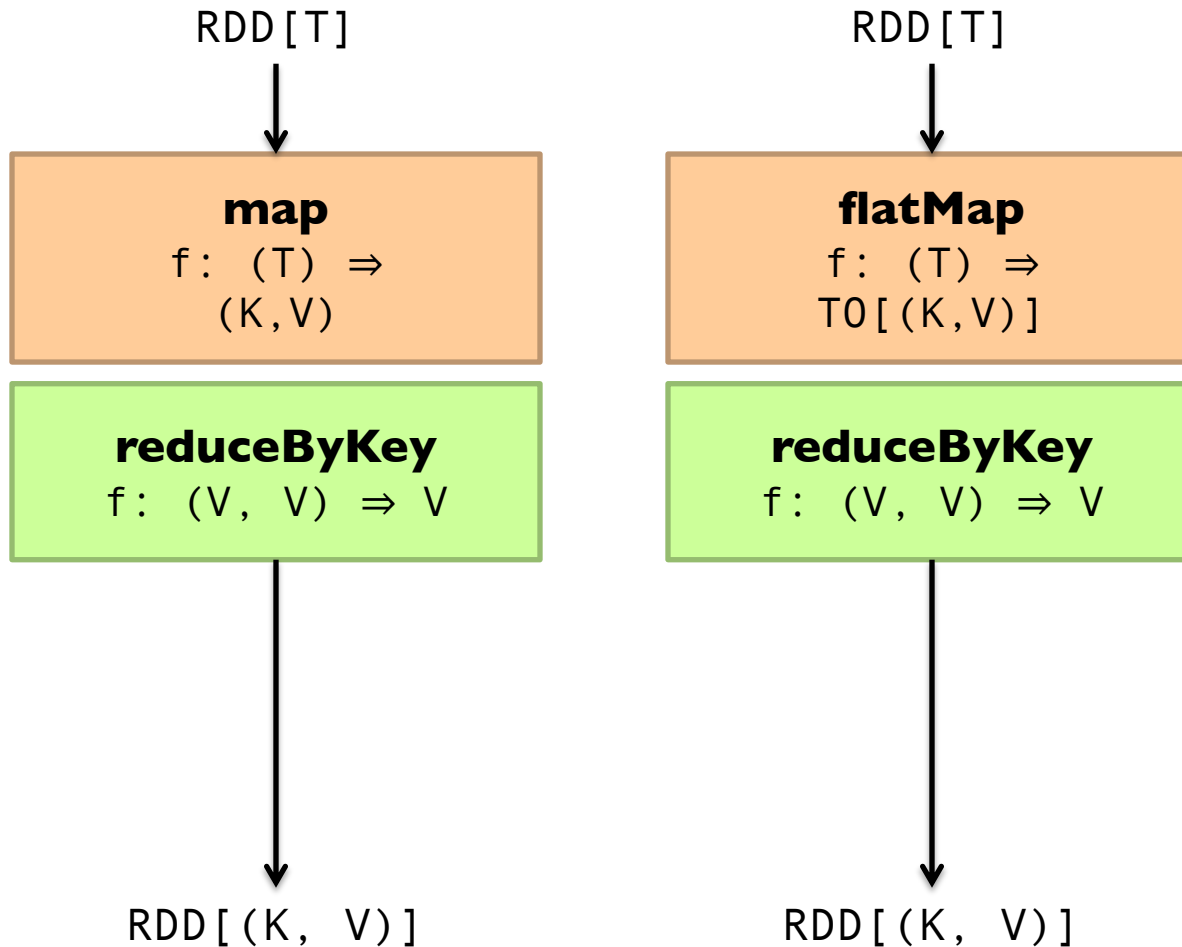

Not quite...

MapReduce in Spark?

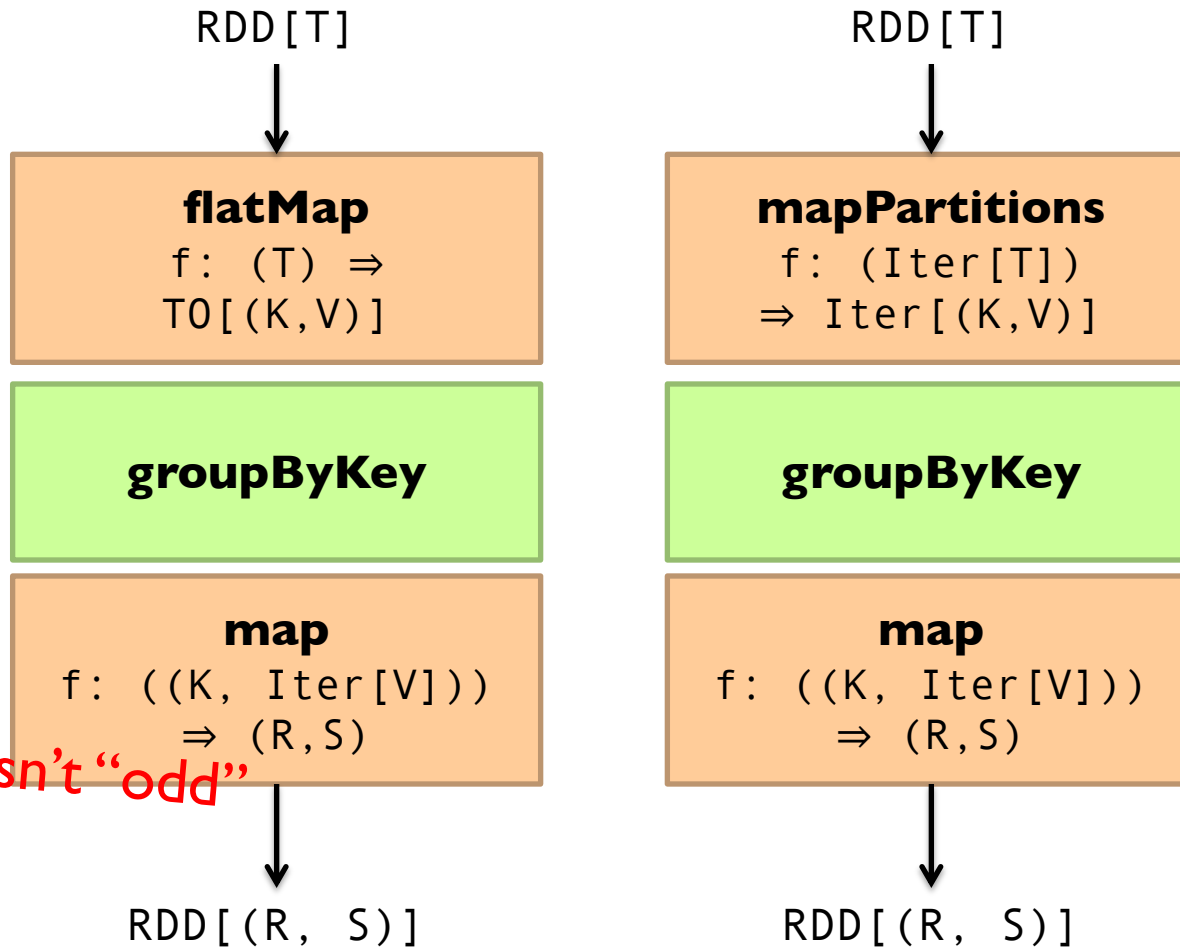

Nope, this isn't "odd"

Still not quite...

Spark Word Count

```
val textFile = sc.textFile(args.input())
```


```
textFile
```

```
  .flatMap(line => tokenize(line))
```

```
  .map(word => (word, 1))
```

```
  .reduceByKey(_ + _)
```

```
  .saveAsTextFile(args.output())
```

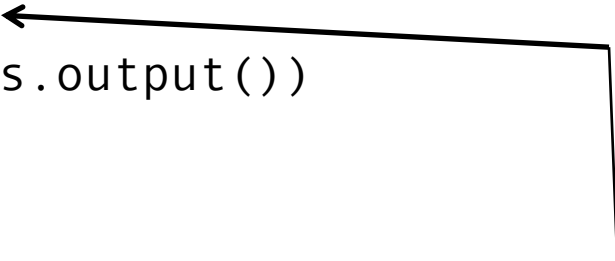

$(x, y) \Rightarrow x + y$

Aside: Scala tuple access notation, e.g., `a._1`

Don't focus on Java verbosity!

```
val textFile = sc.textFile(args.input())

textFile
  .map(object mapper {
    def map(key: Long, value: Text) =
      tokenize(value).foreach(word => write(word, 1))
  })
  .reduce(object reducer {
    def reduce(key: Text, values: Iterable[Int]) = {
      var sum = 0
      for (value <- values) sum += value
      write(key, sum)
    }
  })
  .saveAsTextFile(args.output())
```

Next Time...

What's an RDD?

How does Spark actually work?

Algorithm design: redux

Meanwhile, at 1600 Amphitheatre Parkway...

Sawzall – circa 2003

Lumberjack – circa ??

Flume(Java) – circa 2009

Cloud Dataflow (Flume + MillWheel) – circa 2014

Flume(Java)

Core data types


`PCollection<T>` - a (possibly huge) immutable bag of elements of type `T`
`PTable<K, V>` - a (possibly huge) immutable bag of key-value pairs

Hmm... sounds suspiciously familiar...

Flume(Java)

Primitive operations

PCollection<T>




PCollection<S>

```
PCollection<String> words =  
    lines.parallelDo(new DoFn<String,String>() {  
        void process(String line, EmitFn<String> emitFn) {  
            for (String word : splitIntoWords(line)) {  
                emitFn.emit(word);  
            }  
        }  
    }, collectionOf(strings()));
```

Hmm... looks suspiciously familiar...

Flume(Java)

Primitive operations

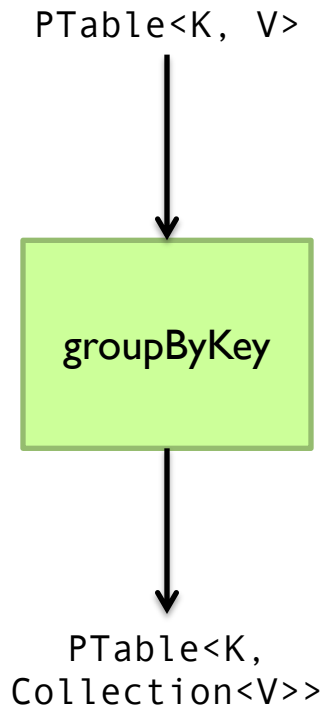

```
PTable<URL,DocInfo> backlinks =
    docInfos.parallelDo(new DoFn<DocInfo, Pair<URL,DocInfo>>() {
        void process(DocInfo docInfo, EmitFn<Pair<URL,DocInfo>> emitFn) {
            for (URL targetUrl : docInfo.getLinks()) {
                emitFn.emit(Pair.of(targetUrl, docInfo));
            }
        }
    }, tableOf(recordsOf(URL.class), recordsOf(DocInfo.class)));

PTable<URL,Collection<DocInfo>> referringDocInfos =
    backlinks.groupByKey();
```

Hmm... looks suspiciously familiar...

Flume(Java)

Primitive operations

`PTable<K,
Collection<V>>`



combineValues
`f: (V, V)
⇒ V`



`PTable<K, V>`

```
PTable<String,Integer> wordsWithOnes =  
    words.parallelDo(  
        new DoFn<String, Pair<String,Integer>>() {  
            void process(String word, EmitFn<Pair<String,Integer>> emitFn) {  
                emitFn.emit(Pair.of(word, 1));  
            }  
        }, tableOf(strings(), ints()));
```

```
PTable<String,Collection<Integer>> groupedWordsWithOnes =  
    wordsWithOnes.groupByKey();
```

```
PTable<String,Integer> wordCounts =  
    groupedWordsWithOnes.combineValues(  
        new DoFn<Pair<String,Collection<Integer>>, Pair<String,Integer>>() {  
            void process(Pair<String,Collection<Integer>> pair,  
                EmitFn<Pair<String,Integer>> emitFn) {  
                int sum = 0;  
                for (Integer val: pair.getValue()) {  
                    sum += val;  
                }  
                emitFn.emit(Pair.of(pair.getKey(), sum));  
            }  
        }, tableOf(strings(), ints()));
```


Hmm... looks suspiciously familiar...

Data-Parallel Dataflow Languages

We have a collection of **records**,
want to apply a bunch of operations
to compute some result

Pig, Dryad(LINQ), Flume(Java), Spark
are all variations on a theme!

Assumption: static collection of records
What if this assumption is violated?

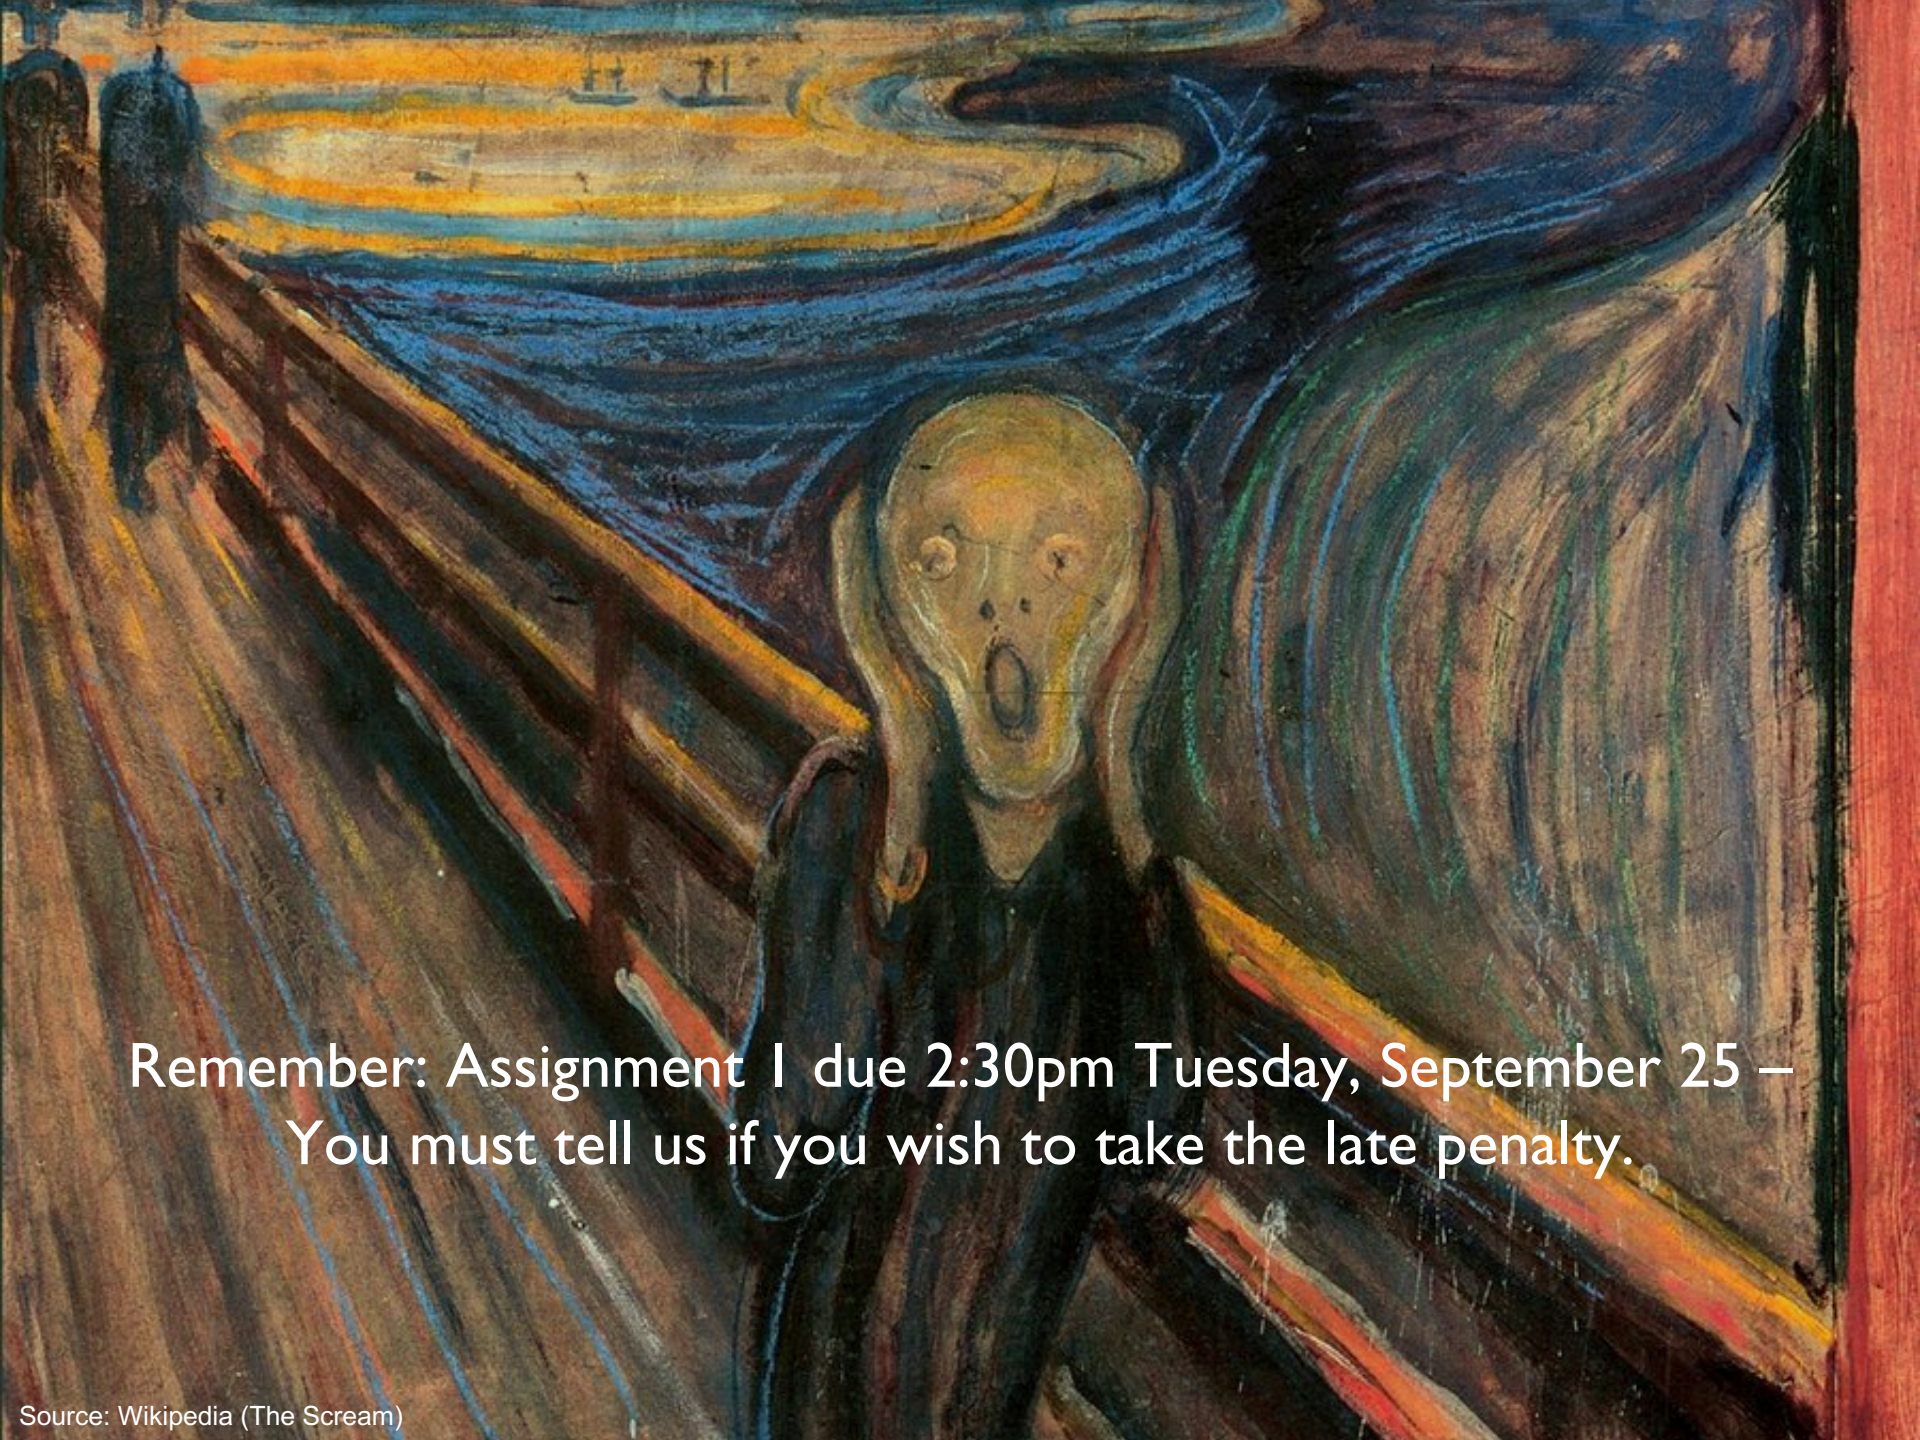

Remember: Assignment I due 2:30pm Tuesday, September 25 –
You must tell us if you wish to take the late penalty.